



ANGILED

用“芯”点亮世界

2025



陕西安捷半导体照明有限公司  
ShaanXi Angile LED Lighting Co.,Ltd.

手机Mobile: 86-13572026364 雷经理 13572026364


通讯邮箱Alternate Email:1906249899@qq.com

官网地址Website: www.angile-led.com

工厂地址Address: 陕西省泾阳县泾惠路东段2号(智能制造装备产业园)

No. 2, East Section, Jinghui Road, Jingyang County, Shaanxi Province

(Intelligent Manufacturing Equipment Industrial Park), ShaanXi,China 713799

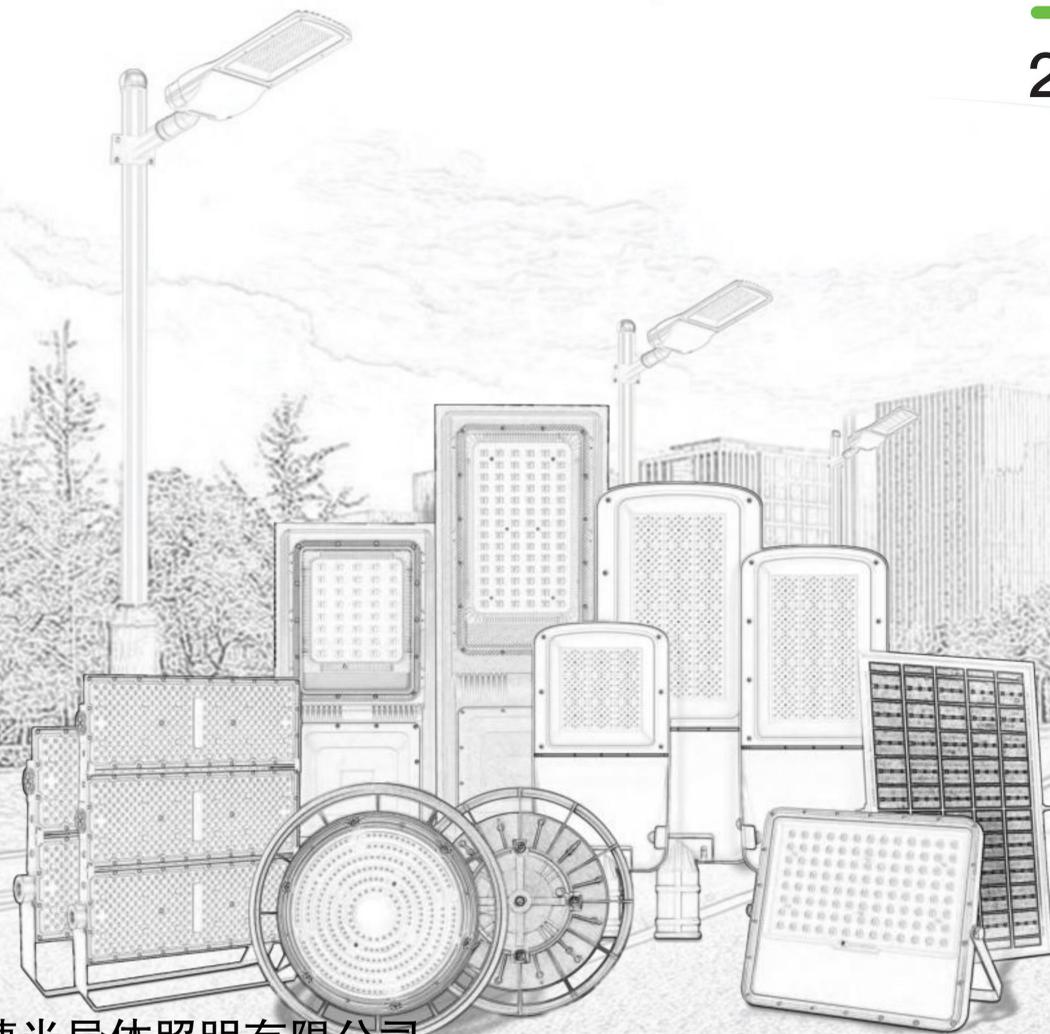

陕西安捷半导体照明有限公司

OUTDOOR  
LIGHTING

High Energy Efficiency, Sufficient Power, Good Heat Dissipation

专注大功率照明  
产品研发销售超过16年





# ENTERPRISE PROFILE

ShaanXi Angile LED Lighting Co.,Ltd was established in May 2011. We are the manufacturer specializing in LED floodlight, high bay light, garden light, street light, rechargeable light and solar light. We are dedicated to interior and outdoor LED lights research, development and production. Our factory has hundreds of employees, products have been exported to Europe, South America, Southeast Asia and other 176 countries. Angile Lighting now has become one of the leading enterprises in the LED industry.

Our company passed the ISO9001 quality system certification since 2016, all our products have passed CE, ROHS, SAA, TUV, etc. High quality and perfect service is highly appreciated by our customers. We strictly follow the principle of "Quality changes the world", we spend 5%–7% of our annual sales value on research and development. All our hardware and software's quality is the best in the LED market. With the drastic competition in the market, we still insist on the principle of "quality first, customer first", to provide first-class products, thoughtful service, preferential prices. We are committed to building the perfect team, providing comprehensive solutions. We sincerely hope to cooperate with you to create a win-win situation.



# Our Team



Since 2011, our team has been focusing on the research and development and sales of high-power lighting products. We have always adhered to the original aspiration of "illuminating the industry with technological breakthroughs and winning trust with quality services". From providing single lighting fixtures to outputting scenario-based intelligent lighting solutions, we have become a benchmark team in the high-power lighting field that combines "technological accumulation" and "implementation capabilities".



## Vision:

- Create Invisible Champions

## Mission:

- Create A Bright Career And A Happy Life

## Values:

- Customer-oriented, Co-creation And Sharing, Integrity, And Gratitude

# Design Refinement

We pursue fashion trends, and with our core design and mold development capability, we have successfully created the value of the brand, and the structure of lamps. Over more than, we focus on the application of LED light sources, our R&D ability is more advanced in LED industry, We repeating rigorous and experimental tests. we undergone strict and thorough inspections from appearance aesthetics, light efficiency, heat dissipation structure, electrical standard to the convenient and safe installation, just strive to make every pieces goods perfect in design and structure.



Needle Flame Test



Ultraviolet Accelerated Weathering Test



Salt Spray Test



High-temperature Aging Test



Integrating Sphere Test



IES Detection



IK07-10 Protection Level Test



IP5\* Dust Resistance Test

# Enterprise Honor Certificate

# Competitiveness Come From Product Quality

Angile continuously innovates and constantly breaks through, closely following the development pace of the latest lighting technology. The product not only has passed international certification standards, but also has obtained utility model and design patents.





PRODUCTS



## CATALOGUE INDEX

LED High Bay Light	1P-28P
LED Street Light	29P-58P
LED Flood Light	59P-80P
LED Garden Light	81P-84P
Solar Flood Light	85P-98P
Solar Garden Light	99P-102P
Solar Street Light	103P-122P



# LED IP65 High Bay Light

Widely used in warehouses, supermarkets, garages, industrial workshops, exhibition halls, gymnasiums and so on.

# Solid Durable

Die-cast aluminum is strong, durable and corrosion-resistant. Not prone to rust.



## High Bay Light 睿光 A AO-003



A variety of lenses are available



### PRODUCT ADVANTAGES AND FEATURES

- ◆ Hollow heat sink design increase more airflow for better heat dissipation
- ◆ High lumen LED , with 50,000hrs lifespan
- ◆ Imported optical lens , its luminous efficiency up to 95%
- ◆ High quality aluminum alloy , anti-corrsion , substantial , durable , artistic , practical . High craft manifesting production value of famous brand
- ◆ Designed diamond face reflection process , super high efficiency reflection light source , effectively enhance the brightness of the illumination

Wattage	Luminous	Power factor	Voltage	Size
100W	150-200lm/W	>0.97	AC100-277V	Ø300*151
150W	150-200lm/W	>0.97	AC100-277V	Ø350*166
200W	150-200lm/W	>0.97	AC100-277V	Ø383*166
240W	150-200lm/W	>0.97	AC100-277V	Ø383*166
300W	150-200lm/W	>0.97	AC100-277V	Ø383*166
400W	150-200lm/W	>0.97	AC100-277V	Ø447*166


**Driver Brand Philips**




**Lumileds Chips**





50000h IK08 Angle: 60°-90°-120°




**Optional**



3 Power Selectable & 3CCT Selectable



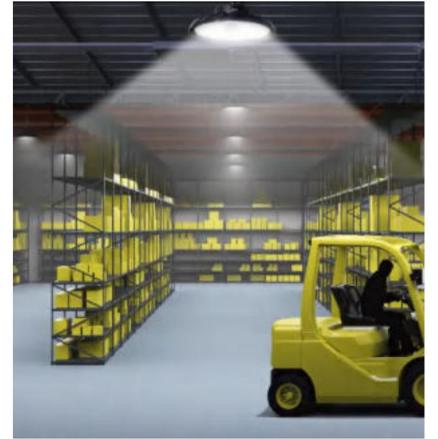

LED High Bay Light

# Strong Dissipate Heat

Die-cast aluminum body for superior heat dispersion.



## High Bay Light 睿光B

AO-023






A variety of lenses are available



### PRODUCT ADVANTAGES AND FEATURES

- ◆ Hollow heat sink design increase more airflow for better heat dissipation
- ◆ High lumen LED , with 50,000hrs lifespan
- ◆ Imported optical lens , its luminous efficiency up to 95%
- ◆ High quality aluminum alloy , anti-corrison , substantial , durable , artistic , practical . High craft manifesting production value of famous brand
- ◆ Designed diamond face reflection process , super high efficiency reflection light source , effectively enhance the brightness of the illumination

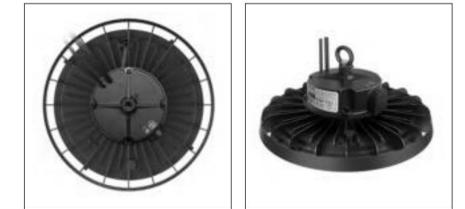

Wattage	Luminous	Power factor	Voltage	Size
100W	150-200lm/W	>0.97	AC100-277V	Ø299*150
150W	150-200lm/W	>0.97	AC100-277V	Ø346*156
200W	150-200lm/W	>0.97	AC100-277V	Ø368*158
240W	150-200lm/W	>0.97	AC100-277V	Ø380*158




LED High Bay Light

# Uniform

## Light Distribution

Precision-engineered optics deliver wide-angle illumination without dark spots, enhancing workplace safety and visual comfort.

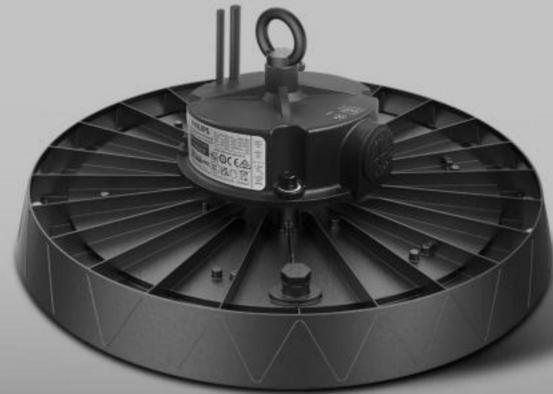

## High Bay Light 睿光C

AO-006



A variety of lenses are available



### PRODUCT ADVANTAGES AND FEATURES

- ◆ Hollow heat sink design increase more airflow for better heat dissipation
- ◆ High lumen LED , with 50,000hrs lifespan
- ◆ Imported optical lens , its luminous efficiency up to 95%
- ◆ High quality aluminum alloy , anti-corrosion , substantial , durable , artistic , practical . High craft manifesting production value of famous brand
- ◆ Designed diamond face reflection process , super high efficiency reflection light source , effectively enhance the brightness of the illumination

Optional

3 Power Selectable & 3CCT Selectable

100% Power Selectable

80% Power Selectable


60% Power Selectable

6500K CCT Selectable

4000K CCT Selectable

3000K CCT Selectable

Wattage	Luminous	Power factor	Voltage	Size
100W	150-200lm/W	>0.97	AC100-277V	Ø300*151
150W	150-200lm/W	>0.97	AC100-277V	Ø349*156
200W	150-200lm/W	>0.97	AC100-277V	Ø382*158
240W	150-200lm/W	>0.97	AC100-277V	Ø382*158

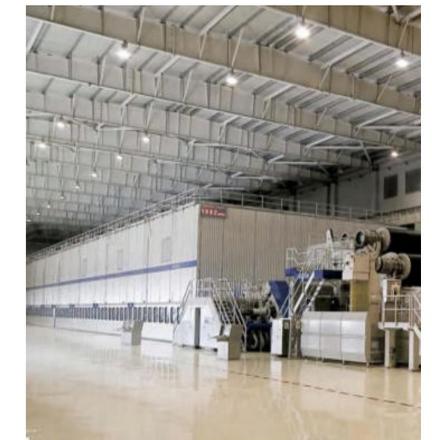

# Versatile

## Industrial Applications

Ideal for warehouses, manufacturing plants, gymnasiums, and logistics centers, providing consistent high-quality lighting for various tasks.



## High Bay Light 睿光D

AO-007



A variety of lenses are available



### PRODUCT ADVANTAGES AND FEATURES

- ◆ Hollow heat sink design increase more airflow for better heat dissipation
- ◆ High lumen LED , with 50,000hrs lifespan
- ◆ Imported optical lens , its luminous efficiency up to 95%
- ◆ High quality aluminum alloy , anti-corrosion , substantial , durable , artistic , practical . High craft manifesting production value of famous brand
- ◆ Designed diamond face reflection process , super high efficiency reflection light source , effectively enhance the brightness of the illumination

Wattage	Luminous	Power factor	Voltage	Size
100W	150-200lm/W	>0.97	AC100-277V	Ø300*151
150W	150-200lm/W	>0.97	AC100-277V	Ø349*156
200W	150-200lm/W	>0.97	AC100-277V	Ø382*158
240W	150-200lm/W	>0.97	AC100-277V	Ø382*158

Driver Brand Philips Lumileds Chips



Optional

50000h IK08 Angle: 60°-90°-120°

3 Power Selectable & 3CCT Selectable

100% Power Selectable 60% CCT Selectable

6500K 4000K 3000K



LED High Bay Light

# Highlight

## Energy Conservation

Cut your lighting bills with our efficient design.  
Years of maintenance-free operation.



## High Bay Light 睿光E

AO-008



A variety of lenses are available






### PRODUCT ADVANTAGES AND FEATURES


- ◆ Hollow heat sink design increase more airflow for better heat dissipation
- ◆ High lumen LED , with 50,000hrs lifespan
- ◆ Imported optical lens , its luminous efficiency up to 95%
- ◆ High quality aluminum alloy , anti-corrison , substantial , durable , artistic , practical . High craft manifesting production value of famous brand
- ◆ Designed diamond face reflection process , super high efficiency reflection light source , effectively enhance the brightness of the illumination

Driver Brand Philips

Lumileds Chips

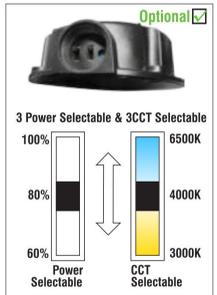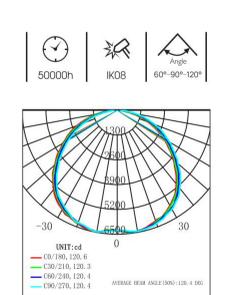

Wattage	Luminous	Power factor	Voltage	Size
100W	150-200lm/W	>0.97	AC100-277V	Ø300*151
150W	150-200lm/W	>0.97	AC100-277V	Ø349*156
200W	150-200lm/W	>0.97	AC100-277V	Ø382*158
240W	150-200lm/W	>0.97	AC100-277V	Ø382*158

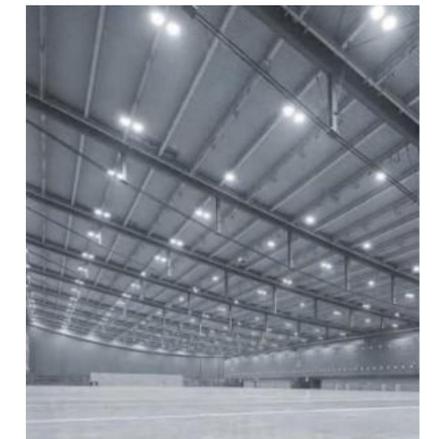



# High quality

Professional heat dissipation structure design, with good heat dissipation module design and implicit ventilation inside and outside the air duct, forming a three-dimensional heat dissipation with the upper and lower air ducts of the heat dissipation fins, which dissipates heat quickly




## High Bay Light 睿光 DOB

AO-022



### PRODUCT ADVANTAGES AND FEATURES


- ◆ Hollow heat sink design increase more airflow for better heat dissipation
- ◆ High lumen LED , with 50,000hrs lifespan
- ◆ Imported optical lens , its luminous efficiency up to 95%
- ◆ High quality aluminum alloy , anti-corrision , substantial , durable , artistic , practical . High craft manifesting production value of famous brand
- ◆ Designed diamond face reflection process , super high efficiency reflection light source , effectively enhance the brightness of the illumination

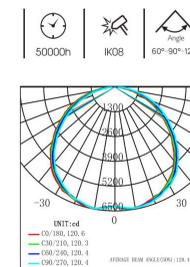

3 Power Selectable & 3 CCT Selectable



Wattage	Luminous	Power factor	Voltage	Size
100W	100-130lm/W	>0.9	AC100-265V	Ø301*83
150W	100-130lm/W	>0.9	AC100-265V	Ø350*95
200W	100-130lm/W	>0.9	AC100-265V	Ø382*95
300W	100-130lm/W	>0.9	AC100-265V	Ø448*97

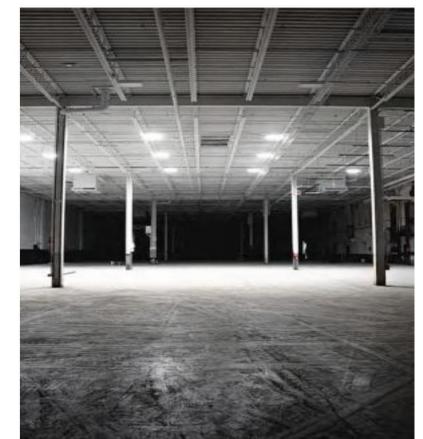

# Uniform light

## Energy Conservation

Achieve bright, uniform light efficiently. Achieve substantial energy savings and reduce carbon footprint with minimal maintenance requirements, offering long-term economic and environmental benefits.



## High Bay Light 极光B

A0-012




### PRODUCT ADVANTAGES AND FEATURES

- ◆ Hollow heat sink design increase more airflow for better heat dissipation
- ◆ High lumen LED , with 50,000hrs lifespan
- ◆ Imported optical lens , its luminous efficiency up to 95%
- ◆ High quality aluminum alloy , anti-corrision , substantial , durable , artistic , practical . High craft manifesting production value of famous brand
- ◆ Designed diamond face reflection process , super high efficiency reflection light source , effectively enhance the brightness of the illumination



Wattage	Luminous	Power factor	Voltage	Size
100W	150-200lm/W	>0.97	AC100-277V	Ø240*153
150W	150-200lm/W	>0.97	AC100-277V	Ø280*156
200W	150-200lm/W	>0.97	AC100-277V	Ø320*157

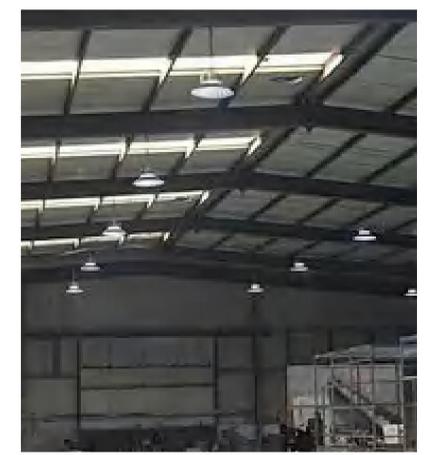



# Versatile

## Industrial Applications

Ideal for warehouses, manufacturing plants, gymnasiums, and logistics centers, providing consistent high-quality lighting for various tasks.

## High Bay Light极光C

A0-013



### PRODUCT ADVANTAGES AND FEATURES

- ◆ Hollow heat sink design increase more airflow for better heat dissipation
- ◆ High lumen LED , with 50,000hrs lifespan
- ◆ Imported optical lens , its luminous efficiency up to 95%
- ◆ High quality aluminum alloy , anti-corrision , substantial , durable , artistic , practical . High craft manifesting production value of famous brand
- ◆ Designed diamond face reflection process , super high efficiency reflection light source , effectively enhance the brightness of the illumination

50000h IK08 Angle 60°-90°-120°

Optional


Unit: cd  
 1. 0.5°半角, 1.5°  
 2. 0.5°半角, 1.5° AVERAGE BEAM ANGLE (CONE) (HL, H, L, 100)

3 Power Selectable & 3 CCT Selectable

100%  
80%  
60% Power Selectable

6500K  
4000K  
3000K CCT Selectable

Wattage	Luminous	Power factor	Voltage	Size
100W	150-200lm/W	>0.97	AC100-277V	Ø240*153
150W	150-200lm/W	>0.97	AC100-277V	Ø280*156
200W	150-200lm/W	>0.97	AC100-277V	Ø320*157

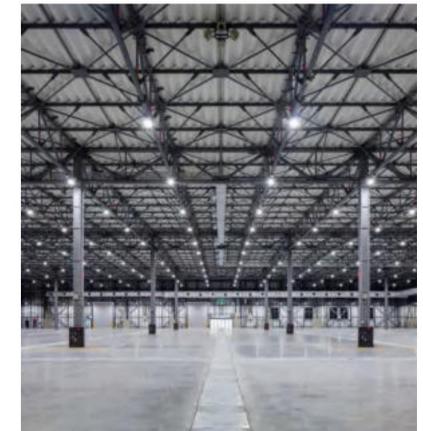

# Outstanding Dissipate Heat

Withstand vibration, corrosion, and impact.  
Engineered to last longer than conventional lights.



## High Bay Light 极光D

A0-014




**PHILIPS**  
LED Electronic Driver / LED 控制装置  
039 249 Made in China/中国  
**TITANIUM**  
100W 0.50-0.60



### PRODUCT ADVANTAGES AND FEATURES


- ◆ Hollow heat sink design increase more airflow for better heat dissipation
- ◆ High lumen LED , with 50,000hrs lifespan
- ◆ Imported optical lens , its luminous efficiency up to 95%
- ◆ High quality aluminum alloy , anti-corrision , substantial , durable , artistic , practical . High craft manifesting production value of famous brand
- ◆ Designed diamond face reflection process , super high efficiency reflection light source , effectively enhance the brightness of the illumination



Optional

3 Power Selectable & 3CCT Selectable  
100% 6500K  
80% 4000K  
60% 3000K  
Power Selectable CCT Selectable

Wattage	Luminous	Power factor	Voltage	Size
100W	150-200lm/W	>0.97	AC100-277V	Ø240*153
150W	150-200lm/W	>0.97	AC100-277V	Ø280*156
200W	150-200lm/W	>0.97	AC100-277V	Ø320*157

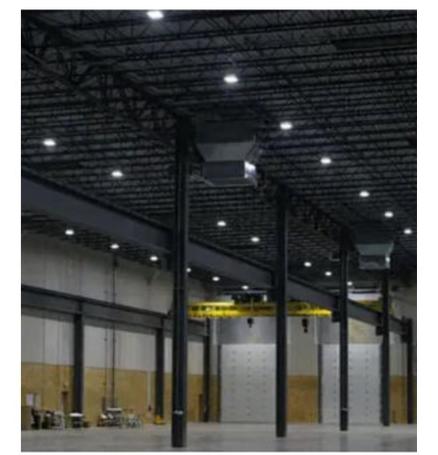

LED High Bay Light



# Brighter

# Irradiation Wider

Widely used for lighting in high-rise factories, workshops, warehouses, exhibition halls, sports venues, waiting rooms, stations, airports, shopping malls, hypermarkets, and other places.


## High Bay Light 燈光A

### AO-015



### PRODUCT ADVANTAGES AND FEATURES

- ◆ Hollow heat sink design increase more airflow for better heat dissipation
- ◆ High lumen LED , with 50,000hrs lifespan
- ◆ Imported optical lens , its luminous efficiency up to 95%
- ◆ High quality aluminum alloy , anti-corrision , substantial , durable , artistic , practical . High craft manifesting production value of famous brand
- ◆ Designed diamond face reflection process , super high efficiency reflection light source , effectively enhance the brightness of the illumination



Optional

3 Power Selectable & 3CCT Selectable

100% Power Selectable

60% Power Selectable

6500K CCT Selectable

4000K CCT Selectable

3000K CCT Selectable

Wattage	Luminous	Power factor	Voltage	Size
100W	150-200lm/W	>0.97	AC100-277V	Ø250*143
200W	150-200lm/W	>0.97	AC100-277V	Ø320*147
300W	150-200lm/W	>0.97	AC100-277V	Ø400*147



LED High Bay Light



# Brighter

## Irradiation Wider

Widely used for lighting in high-rise factories, workshops, warehouses, exhibition halls, sports venues, waiting rooms, stations, airports, shopping malls, hypermarkets, and other places.



## High Bay Light 燈光B

AO-016




### PRODUCT ADVANTAGES AND FEATURES

- ◆ Hollow heat sink design increase more airflow for better heat dissipation
- ◆ High lumen LED , with 50,000hrs lifespan
- ◆ Imported optical lens , its luminous efficiency up to 95%
- ◆ High quality aluminum alloy , anti-corrision , substantial , durable , artistic , practical . High craft manifesting production value of famous brand
- ◆ Designed diamond face reflection process , super high efficiency reflection light source , effectively enhance the brightness of the illumination



Wattage	Luminous	Power factor	Voltage	Size
100W	150-200lm/W	>0.97	AC100-277V	Ø250*143
200W	150-200lm/W	>0.97	AC100-277V	Ø320*147
300W	150-200lm/W	>0.97	AC100-277V	Ø400*147

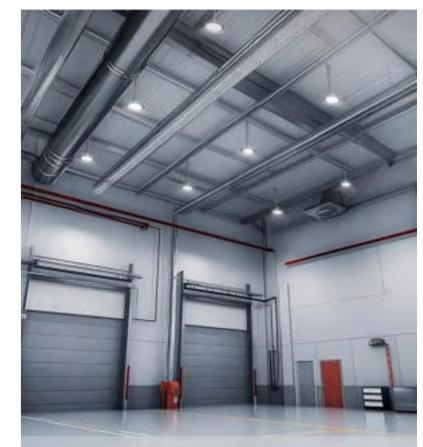

LED High Bay Light



# Brighter

## Irradiation Wider

Widely used for lighting in high-rise factories, workshops, warehouses, exhibition halls, sports venues, waiting rooms, stations, airports, shopping malls, hypermarkets, and other places.


## High Bay Light 燈光C

AO-017



### PRODUCT ADVANTAGES AND FEATURES

- ◆ Hollow heat sink design increase more airflow for better heat dissipation
- ◆ High lumen LED , with 50,000hrs lifespan
- ◆ Imported optical lens , its luminous efficiency up to 95%
- ◆ High quality aluminum alloy , anti-corrision , substantial , durable , artistic , practical . High craft manifesting production value of famous brand
- ◆ Designed diamond face reflection process , super high efficiency reflection light source , effectively enhance the brightness of the illumination



Optional

3 Power Selectable & 3CCT Selectable


100% Power Selectable

6500K CCT Selectable

4000K

3000K

Wattage	Luminous	Power factor	Voltage	Size
100W	150-200lm/W	>0.97	AC100-277V	Ø250*143
200W	150-200lm/W	>0.97	AC100-277V	Ø320*147
300W	150-200lm/W	>0.97	AC100-277V	Ø400*147

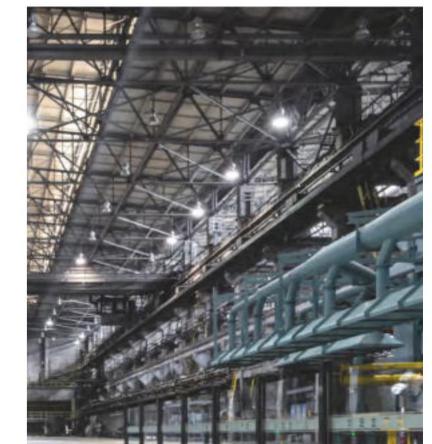

# Stable

## Economical and durable

Compliant with international safety and quality standards (e.g., IP65, CCC, CE, RoHS), guaranteeing reliable operation under demanding conditions.




## High Bay Light 燈光 D

AO-018





Driver Brand Philips Lumileds Chips




### PRODUCT ADVANTAGES AND FEATURES

- ◆ Hollow heat sink design increase more airflow for better heat dissipation
- ◆ High lumen LED , with 50,000hrs lifespan
- ◆ Imported optical lens , its luminous efficiency up to 95%
- ◆ High quality aluminum alloy , anti-corrision , substantial , durable , artistic , practical . High craft manifesting production value of famous brand
- ◆ Designed diamond face reflection process , super high efficiency reflection light source , effectively enhance the brightness of the illumination



Wattage	Luminous	Power factor	Voltage	Size
100W	150-200lm/W	>0.97	AC100-277V	Ø295*151
200W	150-200lm/W	>0.97	AC100-277V	Ø366*154

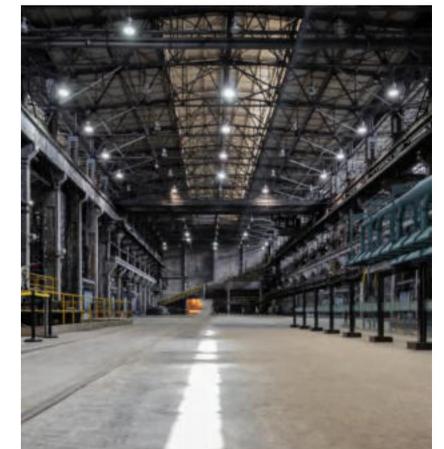

LED High Bay Light



# LED IP65 Street Light

Widely used in urban roads, expressways, pedestrian streets, parks, ports and logistics parks.




security  
reliable

Use International well-known brand driver  
Good transparency, not easy to change color, not  
easy to break, and uniform light effect.


# Street Light 飞渡

## AL-008

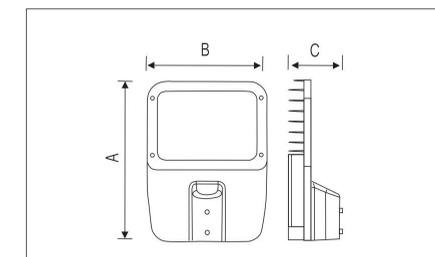

### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation  
performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different  
environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (lx)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
100W	140lm/W	>0.9	AC100-277V	429*300*138
150W	140lm/W	>0.9	AC100-277V	429*300*138
200W	140lm/W	>0.9	AC100-277V	523*300*139
250W	140lm/W	>0.9	AC100-277V	523*300*139
300W	140lm/W	>0.9	AC100-277V	589*302*146
400W	140lm/W	>0.9	AC100-277V	589*302*146




security  
reliable

Use International well-known brand driver  
Good transparency, not easy to change color, not  
easy to break, and uniform light effect.




## Street Light 天鵝B

AL-012

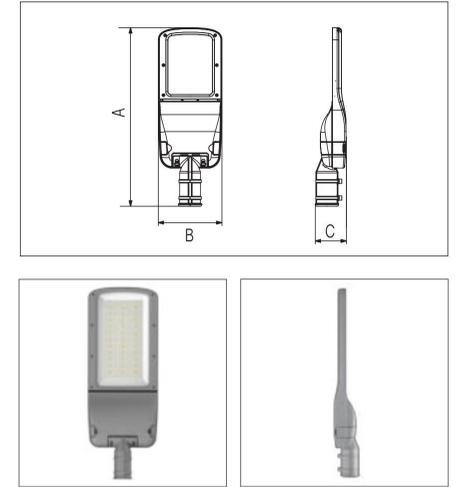

### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation  
performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different  
environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (lx)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
100W	150lm/W	>0.9	AC100-277V	585*210*103
150W	150lm/W	>0.9	AC100-277V	605*265*103
200W	150lm/W	>0.9	AC100-277V	707*265*103
300W	150lm/W	>0.9	AC100-277V	760*280*103



LED Street Light


security  
reliable

Use International well-known brand driver  
Good transparency, not easy to change color, not  
easy to break, and uniform light effect.

## Street Light 飞驰


### AL-014

ISO CB CE RoHS IP65 LED

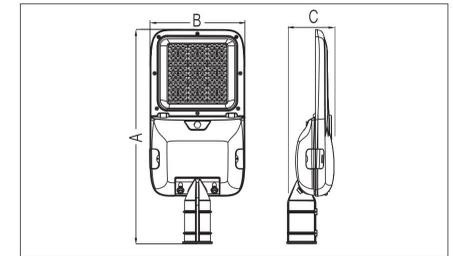


#### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation  
performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different  
environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (lx)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
100W	150lm/W	>0.9	AC100-277V	555*213*120
150W	150lm/W	>0.9	AC100-277V	546*243*122
200W	150lm/W	>0.9	AC100-277V	696*264*128
300W	150lm/W	>0.9	AC100-277V	708*308*115

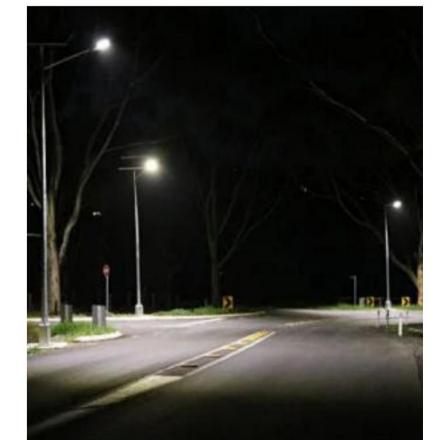

LED Street Light





security  
reliable

Real materials

Good transparency, not easy to change color, not easy to break, and uniform light effect.


## Street Light 云皓 A

AL-006

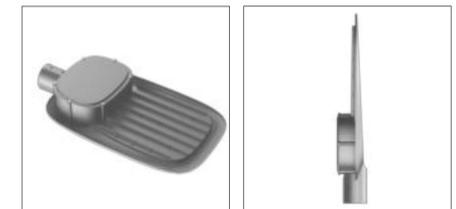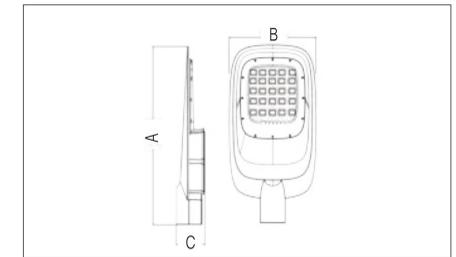


### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (lx)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
50W	150lm/W	>0.9	AC85-305V	408*220*82
100W	150lm/W	>0.9	AC85-305V	479*250*82
150W	150lm/W	>0.9	AC85-305V	545*290*92
200W	150lm/W	>0.9	AC85-305V	702*350*92

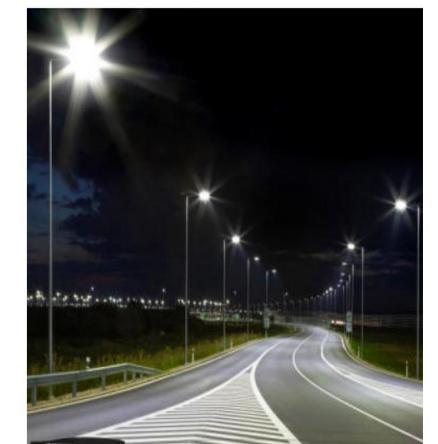

LED Street Light




security  
reliable

Real materials

Good transparency, not easy to change color, not easy to break, and uniform light effect.


## Street Light 云皓B

AL-009

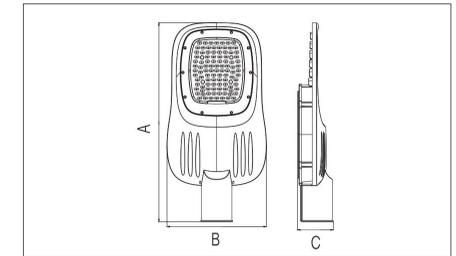


### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future




Dist (M)	Enadir (lx)
1.0m	1.000
1.1m	0.826
1.2m	0.694
1.3m	0.592
1.4m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
50W	150lm/W	>0.9	AC85-305V	446*224*80
100W	150lm/W	>0.9	AC85-305V	466*240*80
150W	150lm/W	>0.9	AC85-305V	552*291*80

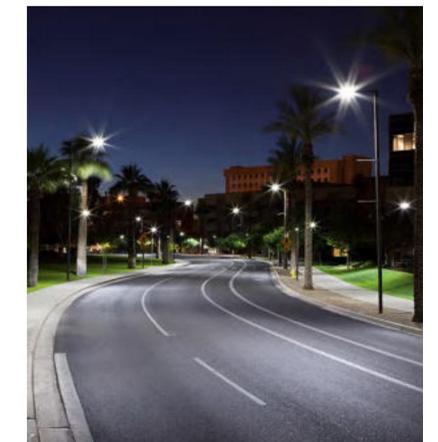

LED Street Light

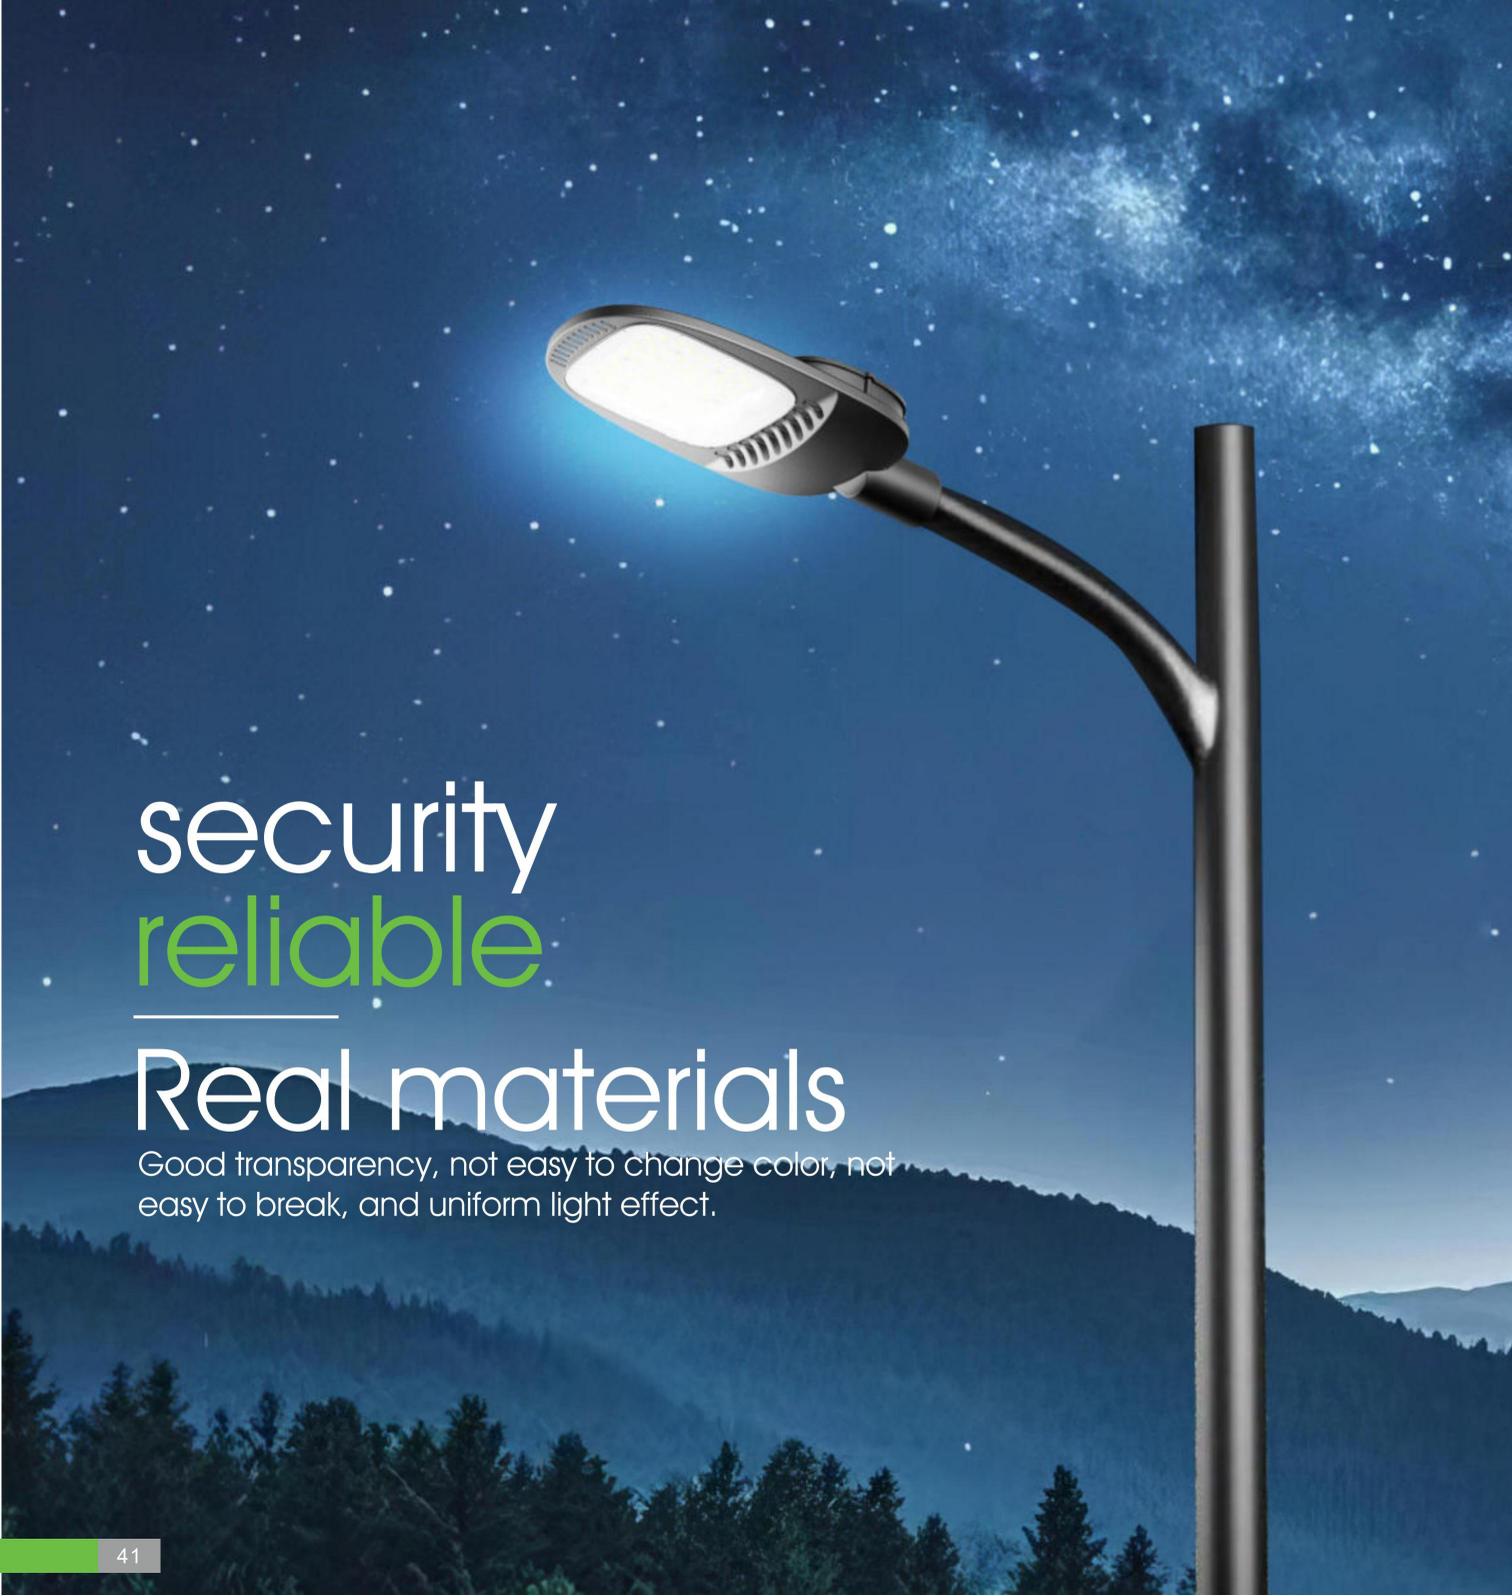


security  
reliable

Real materials

Good transparency, not easy to change color, not easy to break, and uniform light effect.


# Street Light 云皓C

## AL-010

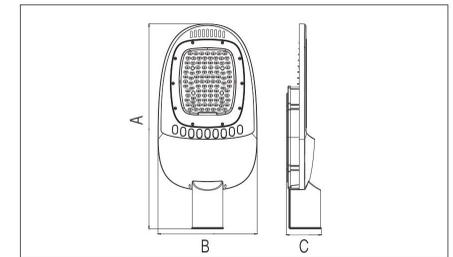


### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (lx)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
50W	150lm/W	>0.9	AC85-305V	452*220*77
100W	150lm/W	>0.9	AC85-305V	496*224*80
150W	150lm/W	>0.9	AC85-305V	590*300*80

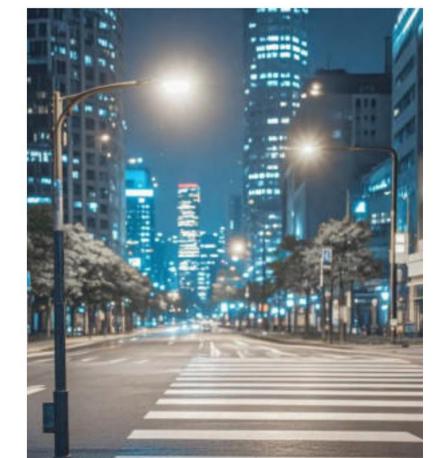


LED Street Light

# three-proof design

Waterproof and anti-aging, providing good lighting effect and improving lighting efficiency


## Street Light 飞挚

### AL-005

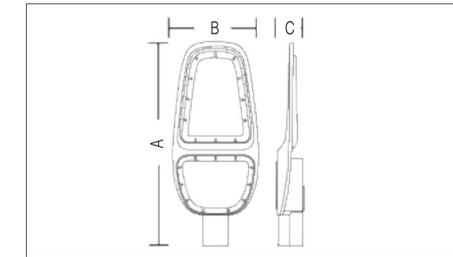


#### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (lx)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
50W	150lm/W	>0.9	AC85-305V	470*206*70
100W	150lm/W	>0.9	AC85-305V	520*232*76
150W	150lm/W	>0.9	AC85-305V	584*279*76
200W	150lm/W	>0.9	AC85-305V	675*314*82
300W	150lm/W	>0.9	AC85-305V	759*359*82

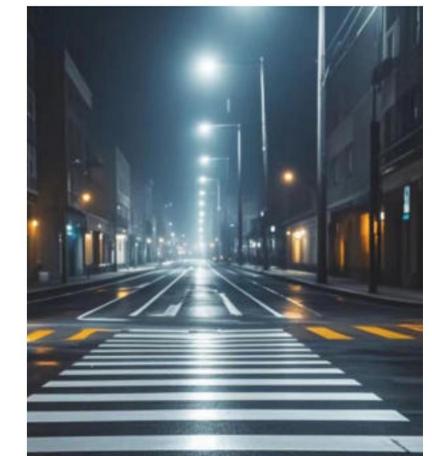



LED Street Light

# three-proof design

Waterproof and anti-aging, providing good lighting effect and improving lighting efficiency


## Street Light 菱形

### AL-001

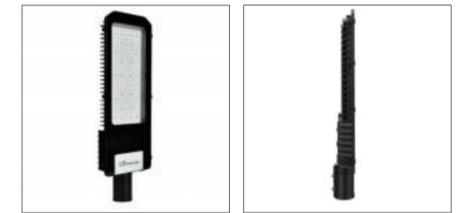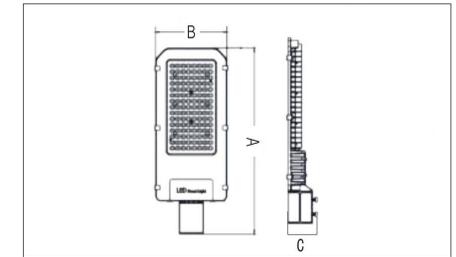


#### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (lx)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
30W	150lm/W	>0.9	AC85-305V	280*135*70
50W	150lm/W	>0.9	AC85-305V	425*180*80
100W	150lm/W	>0.9	AC85-305V	505*215*80
150W	150lm/W	>0.9	AC85-305V	600*235*85
200W	150lm/W	>0.9	AC85-305V	655*245*85
250W	150lm/W	>0.9	AC85-305V	815*305*90
300W	150lm/W	>0.9	AC85-305V	815*305*90

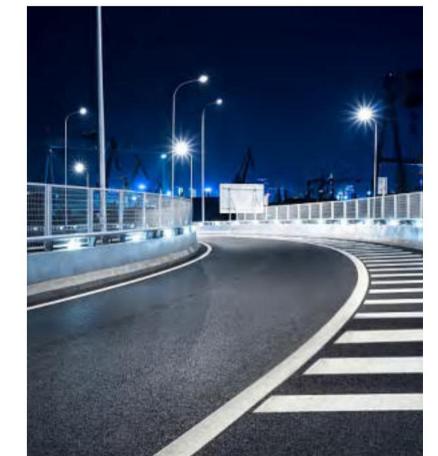


# three-proof design

Waterproof and anti-aging, providing good lighting effect and improving lighting efficiency


## Street Light 云际

### AL-007

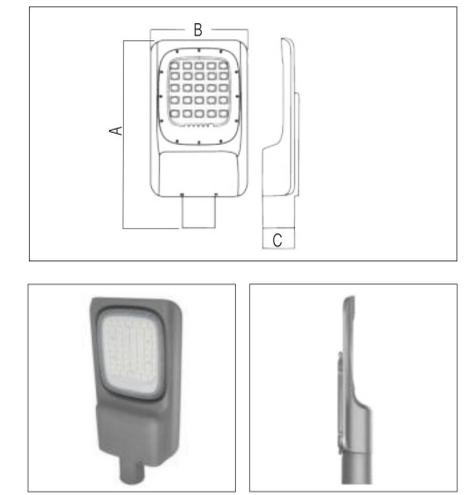

#### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

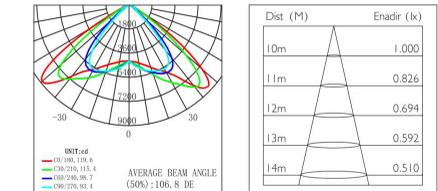

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
50W	150lm/W	>0.9	AC85-305V	415*220*80
100W	150lm/W	>0.9	AC85-305V	486*250*80
150W	150lm/W	>0.9	AC85-305V	558*291*80



LED Street Light



security  
reliable


Real materials

Good transparency, not easy to change color, not easy to break, and uniform light effect.

## Street Light 飞鹰


AL-011

ISO CB CE RoHS IP65 LED

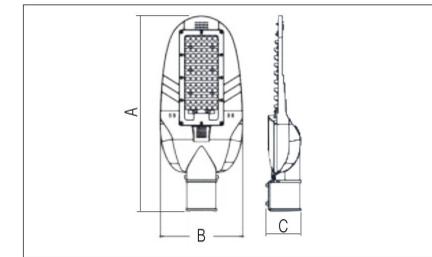

### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (lx)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
50W	150lm/W	>0.9	AC85-305V	470*196*80
100W	150lm/W	>0.9	AC85-305V	545*210*85
150W	150lm/W	>0.9	AC85-305V	670*290*105



LED Street Light


security  
reliable

Real materials

Good transparency, not easy to change color, not easy to break, and uniform light effect.


# Street Light 飞雕

AL-002

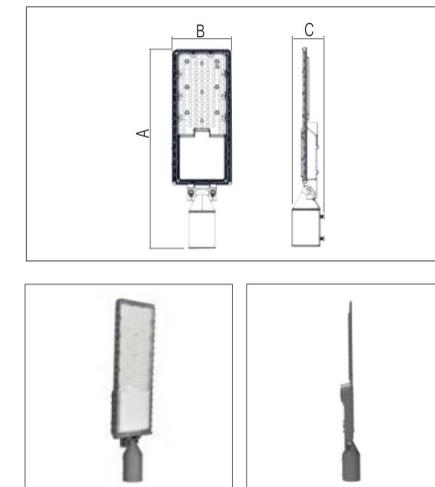

## PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (lx)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
50W	150lm/W	>0.9	AC85-305V	500*160*83
100W	150lm/W	>0.9	AC85-305V	640*214*84
150W	150lm/W	>0.9	AC85-305V	680*256*83
200W	150lm/W	>0.9	AC85-305V	785*260*83



LED Street Light


security  
reliable

90°Adjustment

Good transparency, not easy to change color, not easy to break, and uniform light effect.


# Street Light 飞行A

AL-021

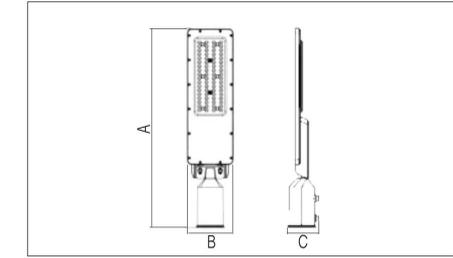


## PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (k)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
50W	100lm/W	>0.9	AC100-265V	445*113*75
100W	100lm/W	>0.9	AC100-265V	500*128*75
150W	100lm/W	>0.9	AC100-265V	565*164*75
200W	100lm/W	>0.9	AC100-265V	685*196*75

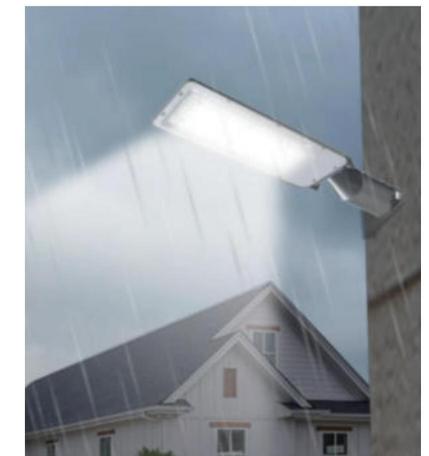

LED Street Light




security  
reliable

90° Adjustment

Good transparency, not easy to change color, not easy to break, and uniform light effect.


## Street Light 飞行C

AL-070

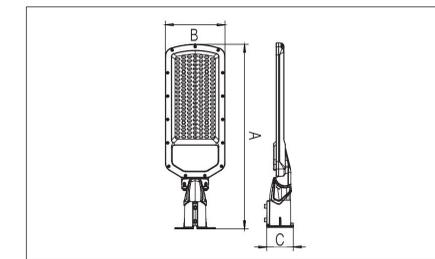

### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (k)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
50W	150lm/W	>0.9	AC85-305V	420*130*68
100W	150lm/W	>0.9	AC85-305V	474*154*68
150W	150lm/W	>0.9	AC85-305V	540*174*72
200W	150lm/W	>0.9	AC85-305V	595*184*72




LED Street Light

security  
reliable



90° Adjustment

Good transparency, not easy to change color, not easy to break, and uniform light effect.

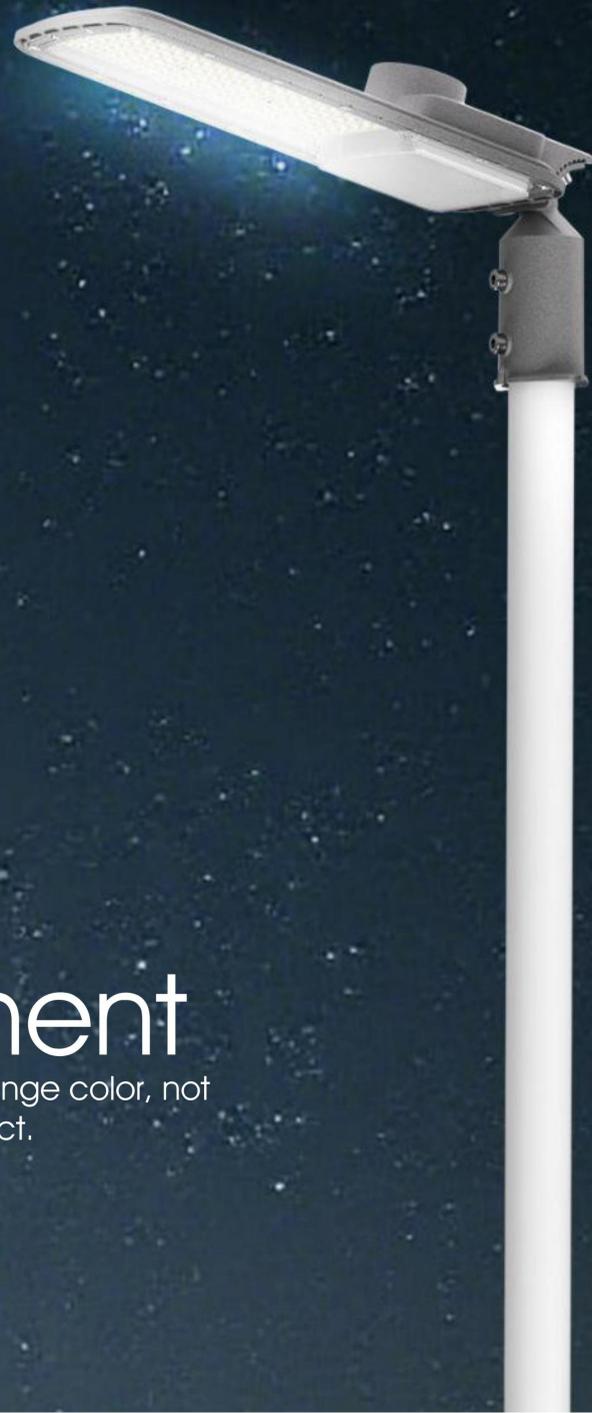


## Street Light 飞洋C

AL-064

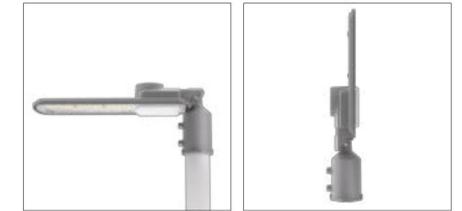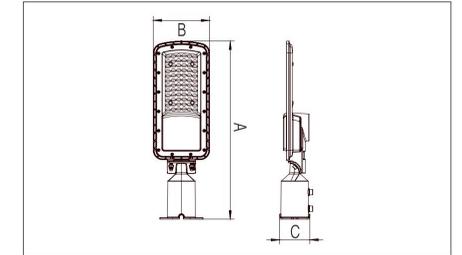


### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (lx)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510


Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
50W	150lm/W	>0.9	AC85-305V	420*130*68
100W	150lm/W	>0.9	AC85-305V	474*154*68
150W	150lm/W	>0.9	AC85-305V	540*174*72
200W	150lm/W	>0.9	AC85-305V	595*184*72

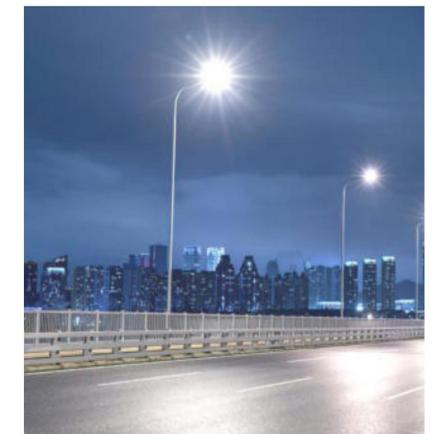

LED Street Light

# LED IP65 Flood Light



Widely used in road and street lighting, squares, parks, farms, courtyards, outdoor parking lots, warehouses, stadiums, billboards and so on.

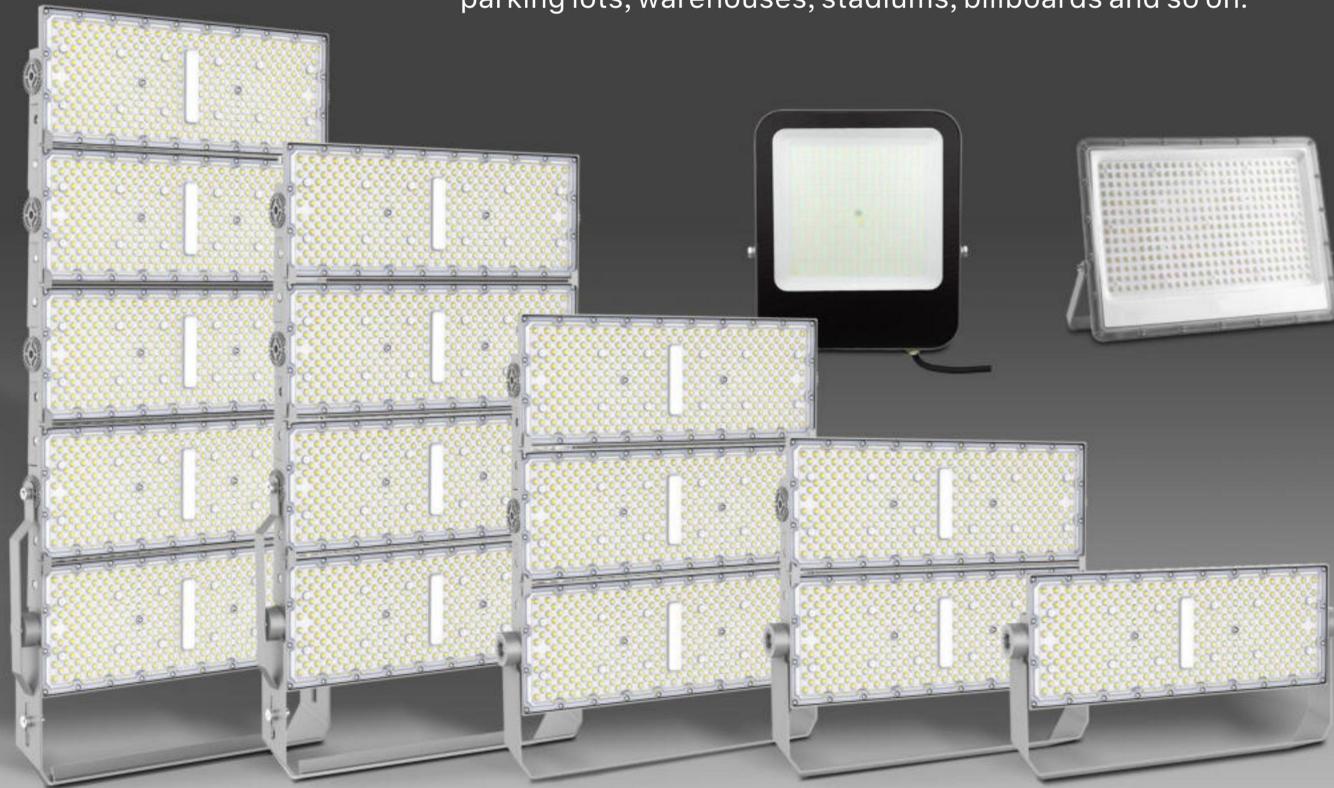

# You can DIY!!

## Place available


Use International well-known brand driver  
The lamp body is adjustable, aiming at any object that needs to be illuminated, unaffected by climate conditions

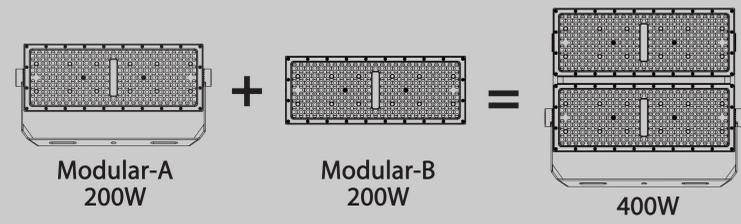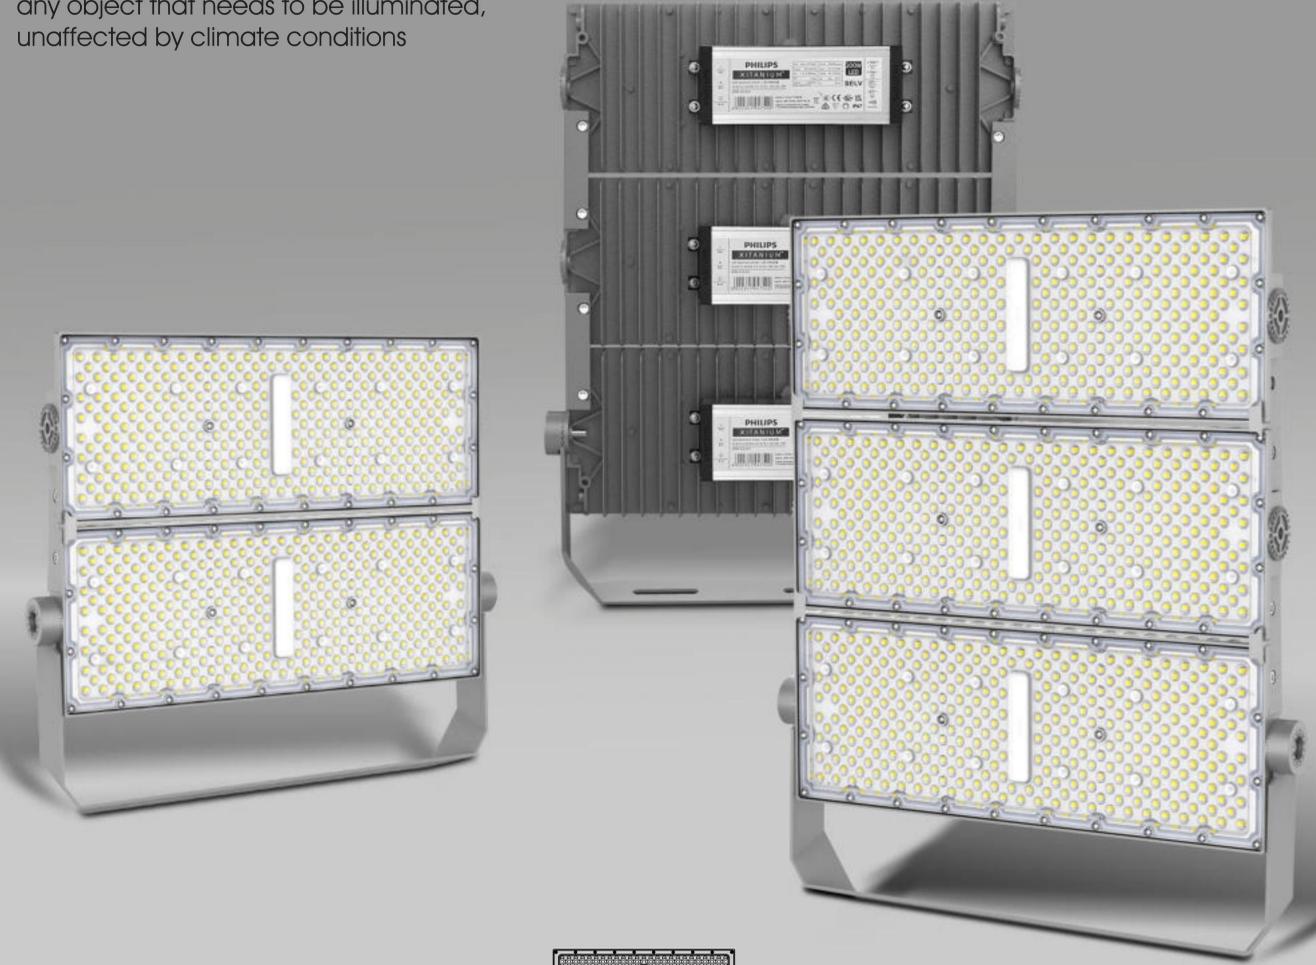

## Flood Light 连云F 200W 模组



AT-006

200W per module for options

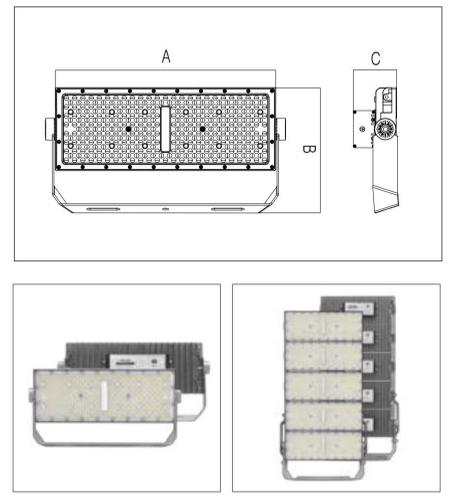


### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

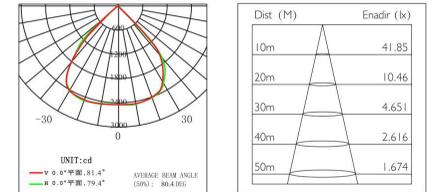


Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
200W	150lm/W	> 0.9	AC100-277V	400*150*78
400W	150lm/W	> 0.9	AC100-277V	400*315*78
600W	150lm/W	> 0.9	AC100-277V	400*480*78
800W	150lm/W	> 0.9	AC100-277V	400*644*78
1000W	150lm/W	> 0.9	AC100-277V	400*808*78

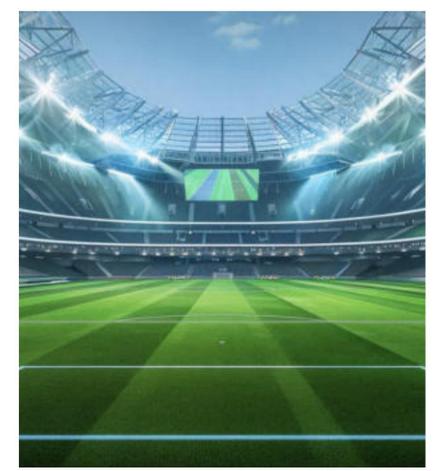

# You can DIY!!

## Place available

Use International well-known brand driver  
The lamp body is adjustable, aiming at  
any object that needs to be illuminated,  
unaffected by climate conditions

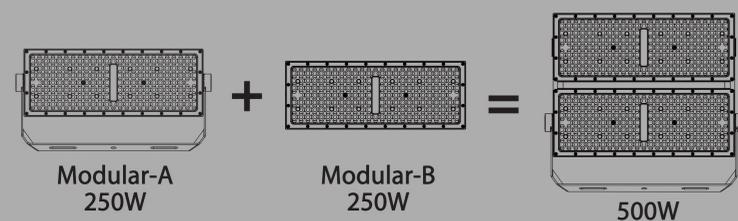


## Flood Light 连云F 250W模组

AT-007




250W per module for options

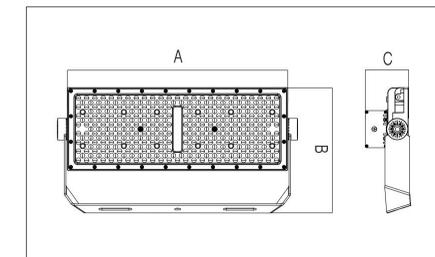

### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist. (M)	Enadir (lx)
10m	41.85
20m	10.46
30m	4.651
40m	2.616
50m	1.674

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
250W	150lm/W	> 0.9	AC100-277V	400*150*78
500W	150lm/W	> 0.9	AC100-277V	400*315*78
750W	150lm/W	> 0.9	AC100-277V	400*480*78
1000W	150lm/W	> 0.9	AC100-277V	806*315*78
1500W	150lm/W	> 0.9	AC100-277V	806*479*78
2000W	150lm/W	> 0.9	AC100-277V	806*643*78



# You can DIY!!


## Place available

Use International well-known brand driver  
The lamp body is adjustable, aiming at  
any object that needs to be illuminated,  
unaffected by climate conditions




## Flood Light 连云F 100W模组

### AT-008

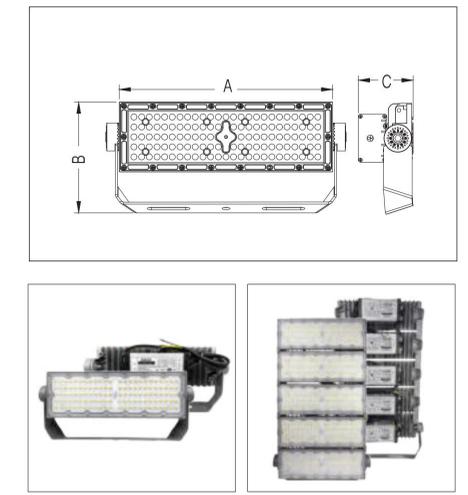


### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

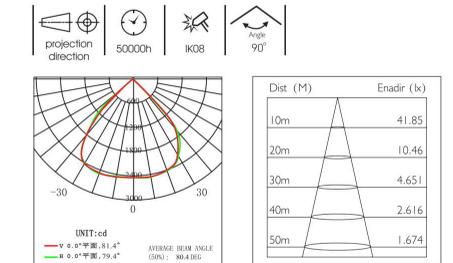


Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
100W	150lm/W	> 0.9	AC100-277V	301*98*77
200W	150lm/W	> 0.9	AC100-277V	301*203*77
300W	150lm/W	> 0.9	AC100-277V	301*307*77
400W	150lm/W	> 0.9	AC100-277V	301*412*77
500W	150lm/W	> 0.9	AC100-277V	301*516*77
600W	150lm/W	> 0.9	AC100-277V	608*307*77
800W	150lm/W	> 0.9	AC100-277V	608*412*77
1000W	150lm/W	> 0.9	AC100-277V	608*516*77
1200W	150lm/W	> 0.9	AC100-277V	608*620*77


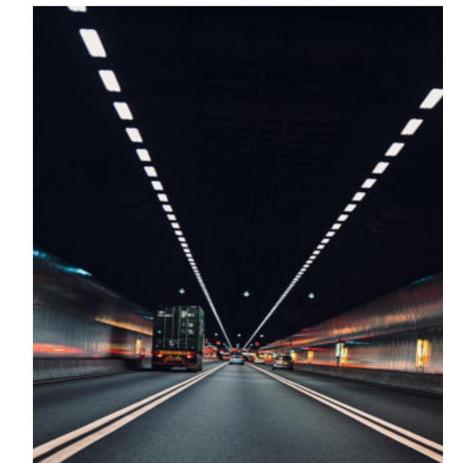


# Ultrathin design

Use International well-known brand driver  
The lamp body is adjustable, aiming at  
any object that needs to be illuminated,  
unaffected by climate conditions

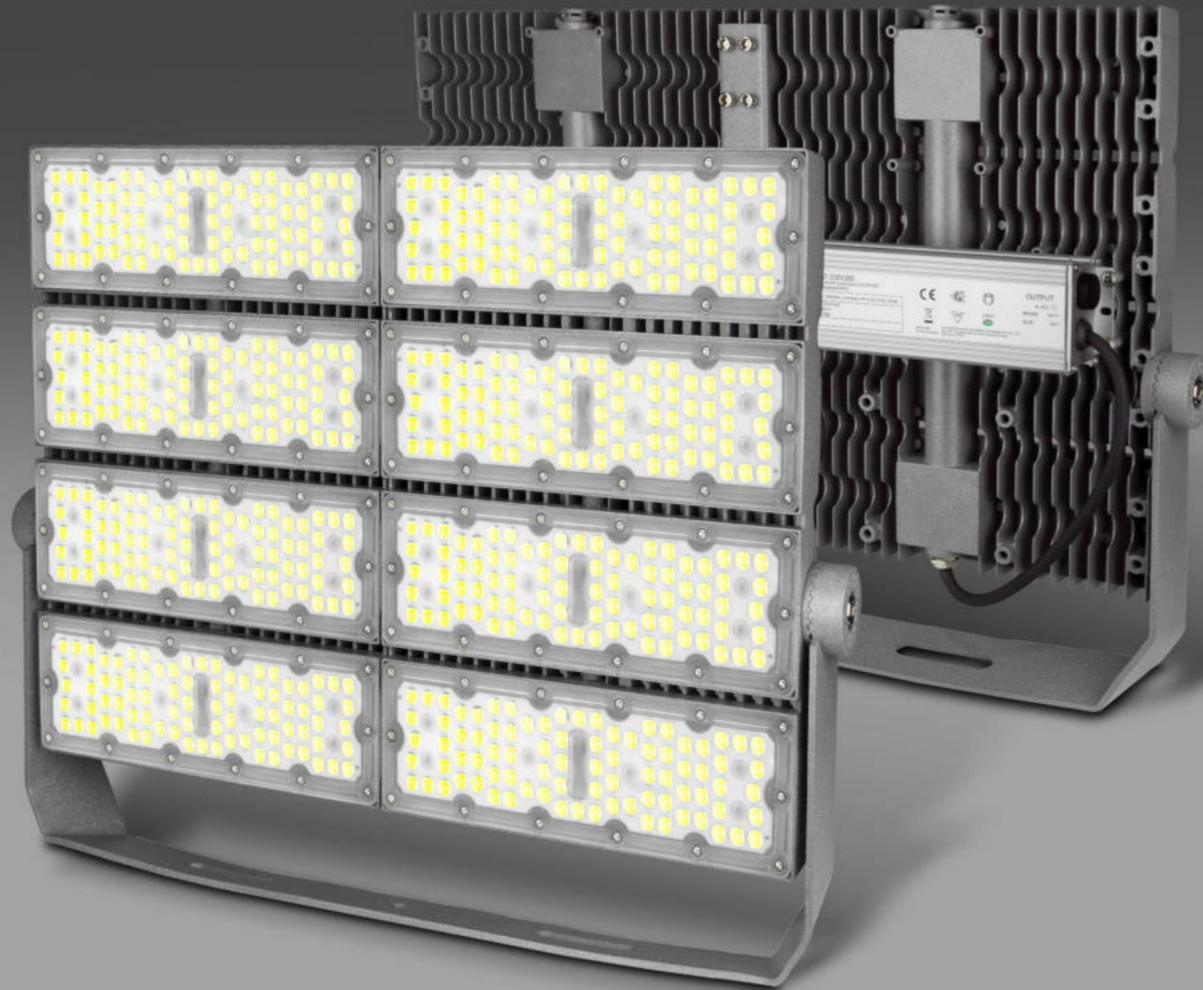


## Flood Light 连云G AT-009

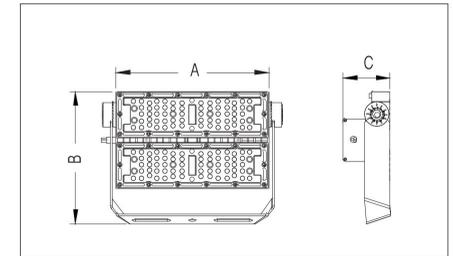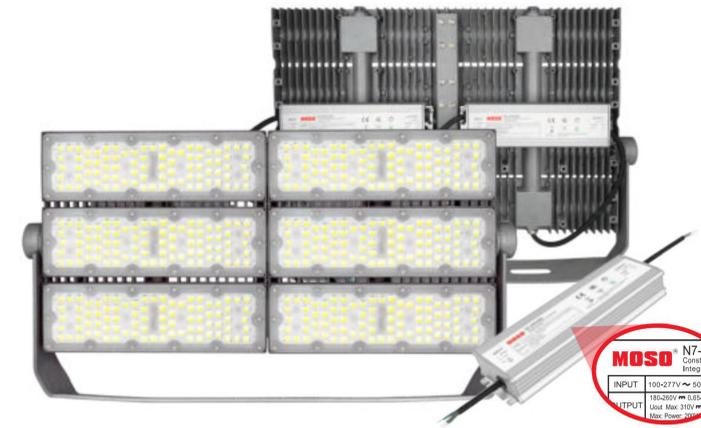


### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation  
performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different  
environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future




Dist (M)	Enadir (lx)
10m	41.85
20m	10.46
30m	4.651
40m	2.616
50m	1.674

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
300W	150lm/W	> 0.9	AC100-277V	481*231*73
400W	150lm/W	> 0.9	AC100-277V	481*310*73
500W	150lm/W	> 0.9	AC100-277V	481*389*73
600W	150lm/W	> 0.9	AC100-277V	481*468*73

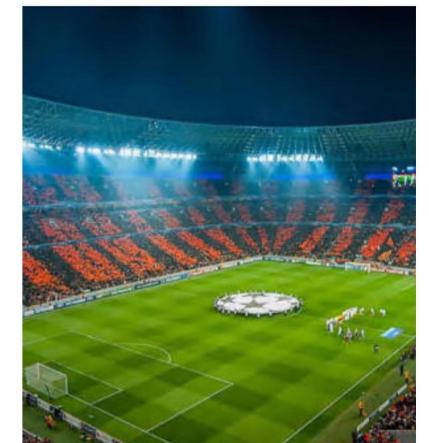


# Ultrathin design

Ultra thin integrated design for more compact and excellent exposure reduction of lighting fixtures

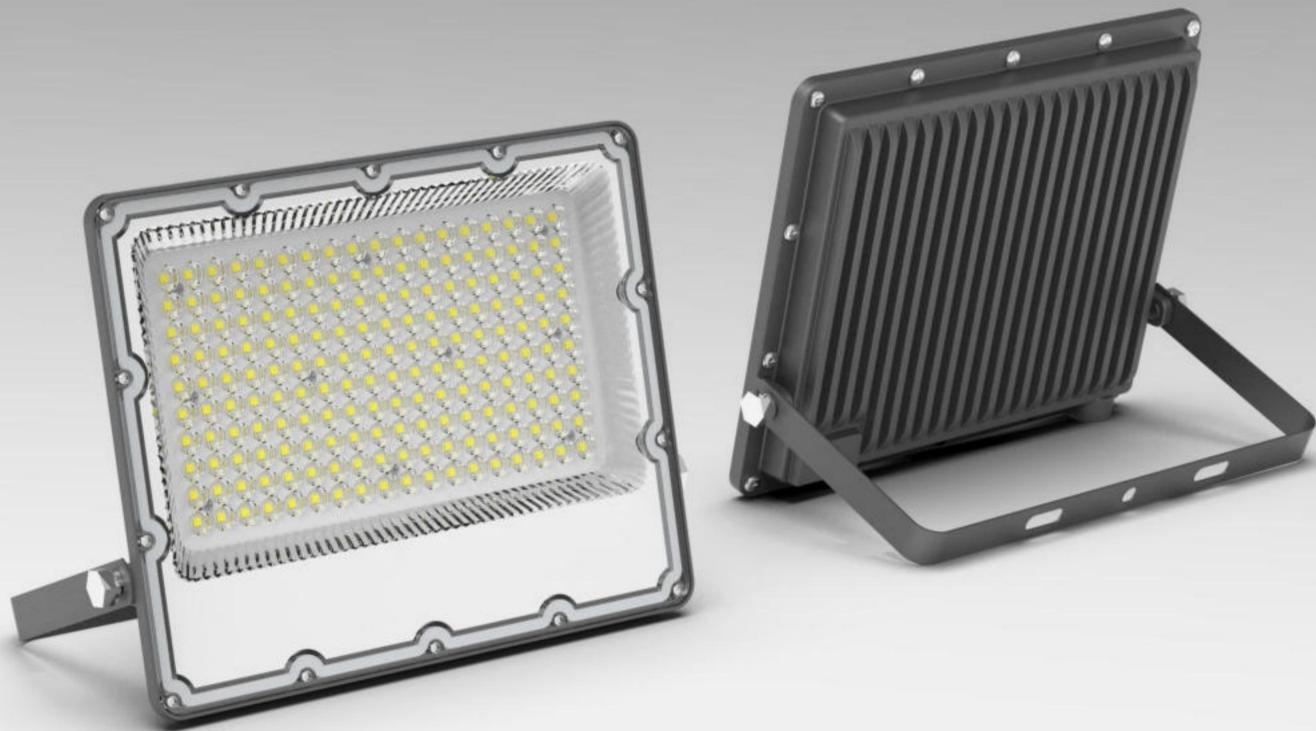


## Flood Light 星辰

AT-021

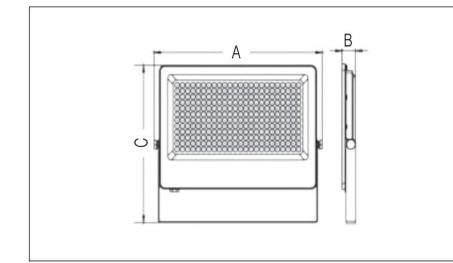

### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

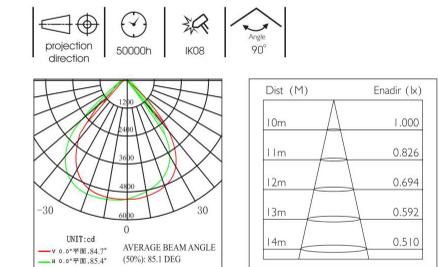

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
10W	100lm/W	>0.9	AC100-265V	130*25*100
20W	100lm/W	>0.9	AC100-265V	150*25*130
30W	100lm/W	>0.9	AC100-265V	162*25*135
50W	100lm/W	>0.9	AC100-265V	190*25*165
100W	100lm/W	>0.9	AC100-265V	230*25*195
150W	100lm/W	>0.9	AC100-265V	255*25*210
200W	100lm/W	>0.9	AC100-265V	315*25*220
300W	100lm/W	>0.9	AC100-265V	420*25*360
400W	100lm/W	>0.9	AC100-265V	485*30*455
500W	100lm/W	>0.9	AC100-265V	570*25*398
600W	100lm/W	>0.9	AC100-265V	570*25*460




# Bright and soft light

Large angle beam coverage area, large exposure area, bright, comfortable, and soft lighting




## Flood Light 星耀 AT-023

ISO CB CE ROHS IP65 LED

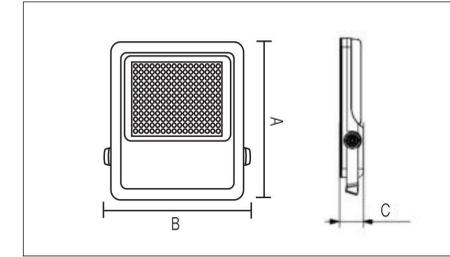

### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (lx)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
50W	110lm/W	>0.9	AC85-305V	272*230*45
100W	110lm/W	>0.9	AC85-305V	272*318*50
150W	110lm/W	>0.9	AC85-305V	285*343*55
200W	110lm/W	>0.9	AC85-305V	350*415*60
300W	110lm/W	>0.9	AC85-305V	405*480*60
400W	110lm/W	>0.9	AC85-305V	485*505*60







# Bright and soft light

Large angle beam coverage area, large exposure area, bright, comfortable, and soft lighting


## Flood Light 星科

AT-024

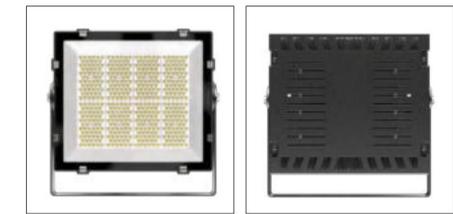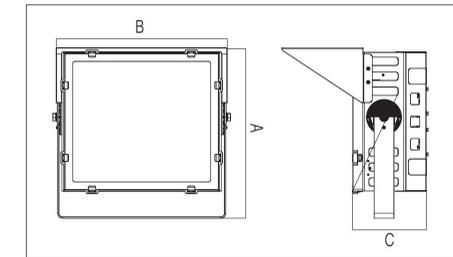


### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (lx)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
200W	150lm/W	>0.9	AC85-305V	324*332*137
400W	150lm/W	>0.9	AC85-305V	393*372*163
600W	150lm/W	>0.9	AC85-305V	515*372*163
1000W	150lm/W	>0.9	AC85-305V	537*473*163

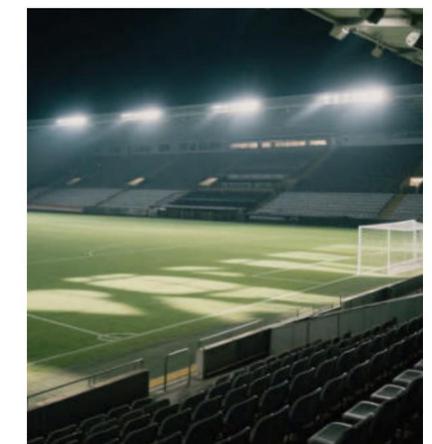


# Bright and soft light

Large angle beam coverage area, large exposure area, bright, comfortable, and soft lighting




## Flood Light 星奥 AT-043

ISO CB CE ROHS IP65 LED

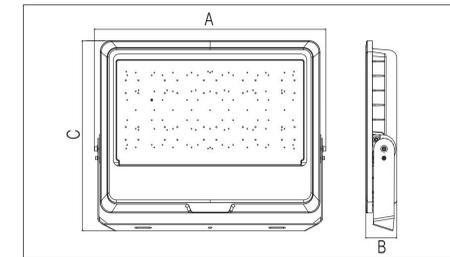

### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (k)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
50W	110lm/W	>0.9	AC85-305V	215*59*206
100W	110lm/W	>0.9	AC85-305V	270*65*290
200W	110lm/W	>0.9	AC85-305V	327*83*398
300W	110lm/W	>0.9	AC85-305V	376*83*447
400W	110lm/W	>0.9	AC85-305V	447*83*493
500W	110lm/W	>0.9	AC85-305V	522*83*509
600W	110lm/W	>0.9	AC85-305V	622*83*508




# Bright and soft light

Large angle beam coverage area, large exposure area, bright, comfortable, and soft lighting




## Flood Light 星空 AT-044

ISO CB CE RoHS IP65 LED

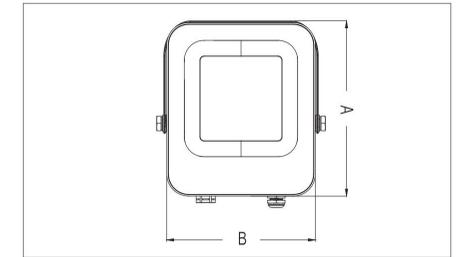

### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (k)
10m	1.000
11m	0.826
12m	0.694
13m	0.592
14m	0.510

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
50W	110lm/W	>0.9	AC100-265V	225*175*33
100W	110lm/W	>0.9	AC100-265V	265*215*33
150W	110lm/W	>0.9	AC100-265V	305*250*33
200W	110lm/W	>0.9	AC100-265V	340*285*33




# Ultrathin design

Ultra thin integrated design for more compact and excellent exposure reduction of lighting fixtures




## Flood Light 蚂蚁 AT-045

ISO CB CE RoHS IP65 LED

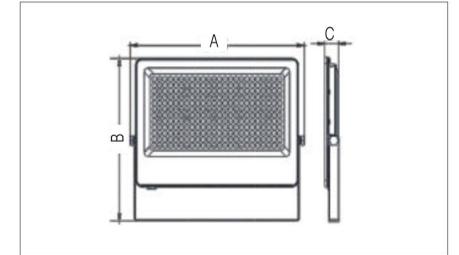


### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future

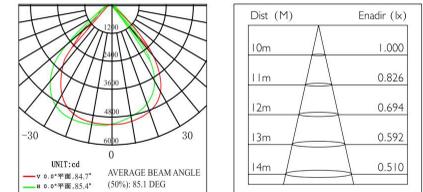

Wattage	Luminous	Power factor	Voltage	Size(A*B*C)
30W	100lm/W	>0.55	AC100-265V	123*148*23.8
50W	100lm/W	>0.55	AC100-265V	160*205*25.5
100W	100lm/W	>0.55	AC100-265V	210*270*25.5
150W	100lm/W	>0.55	AC100-265V	248*329*25.5
200W	100lm/W	>0.55	AC100-265V	280*378*25.5
300W	100lm/W	>0.55	AC100-265V	315*425*27.0
400W	100lm/W	>0.55	AC100-265V	360*470*28.0

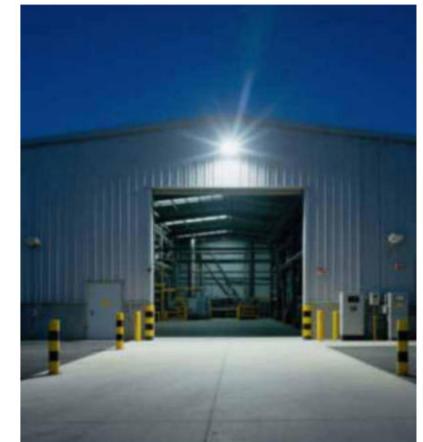


# Fearless of storms

Professional outdoor protection design, rigorous protection treatment, preventing the infiltration of rainwater and dust, meeting conventional outdoor applications without fear of wind and rain




## Garden Light 五星

AS-001

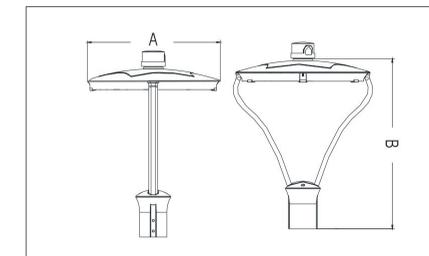

### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist. (M)	Enadir (lx)
10m	41.85
20m	10.46
30m	4.651
40m	2.616
50m	1.674

Wattage	Luminous	Power factor	Voltage	Size(A*B)
50W	100lm/W	>0.9	AC85-305V	Ø466*H565
100W	100lm/W	>0.9	AC85-305V	Ø466*H565
150W	100lm/W	>0.9	AC85-305V	Ø466*H565






Premium quality

High brightness, high lumens,  
high display Stable lifespan



## Garden Light 榮耀

AS-002

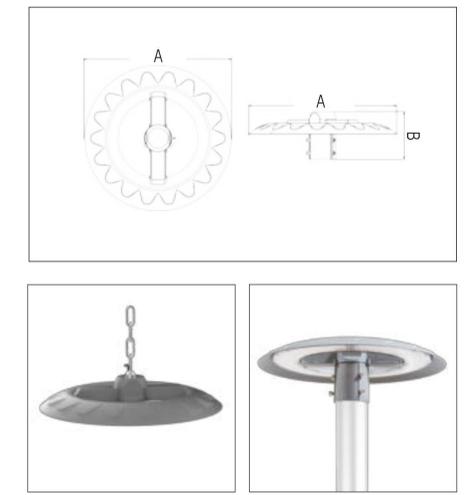


### PRODUCT ADVANTAGES AND FEATURES

- ◆ Integrated cooling design, elegant, efficient  
Streamline design, beautiful appearance, no accumulation
- ◆ Die-casting aluminum case, excellent heat dissipation performance, durable
- ◆ Durable outdoor painting process of the product, excellent quality.
- ◆ anti-corrosion and anti-rusting performance, widely used in different environment
- ◆ Light transfer efficiency up to 94%, easy to improve in the future



Dist (M)	Enadir (lx)
10m	41.85
20m	10.46
30m	4.651
40m	2.616
50m	1.674

Wattage	Luminous	Power factor	Voltage	Size(A*B)
50W	120lm/W	>0.9	AC85-305V	Ø458*H149.7
100W	120lm/W	>0.9	AC85-305V	Ø458*H149.7

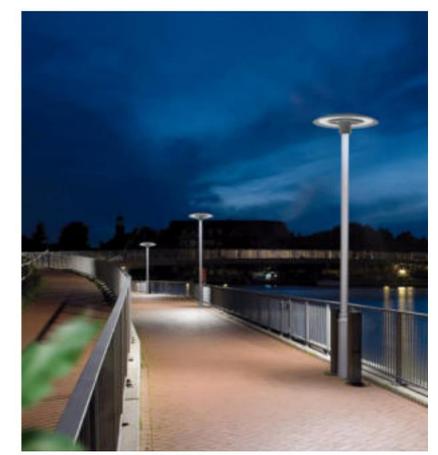

LED Garden Light

# Solar IP65 Flood Light

Widely used in road lighting, squares, parks, farms, courtyards, outdoor parking lots, outdoor sports fields, industrial parks and so on.




# Lights up all night

Adopting new power supply, environmentally friendly and high-quality batteries




## Solar Flood Light 星月

AB-002

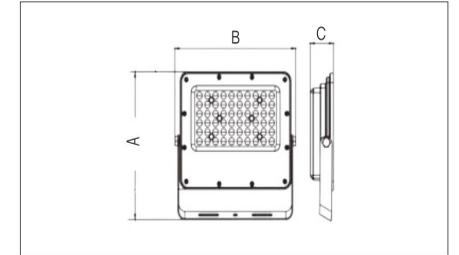

### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

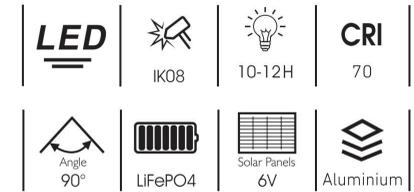

Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
100W	3.2V 5AH	6V 8W	38PCS	190*180*43
200W	3.2V 10AH	6V 15W	58PCS	218*226*43
300W	3.2V 15AH	6V 20W	118PCS	269*285*45
400W	3.2V 20AH	6V 25W	178PCS	293*347*44



### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control



# Three color

Three color temperature modes adjustment. Adopting new power supply, environmentally friendly and high-quality batteries

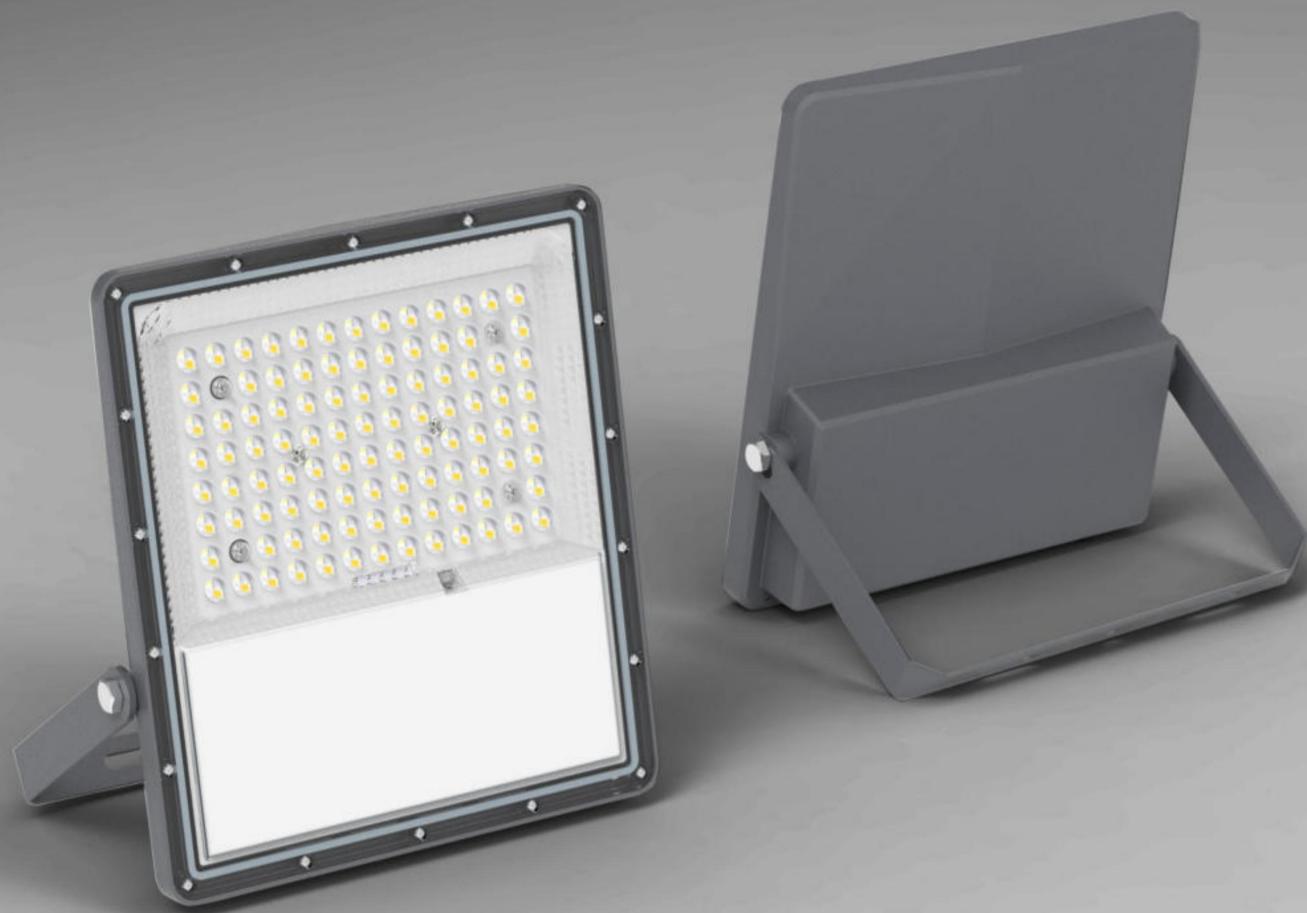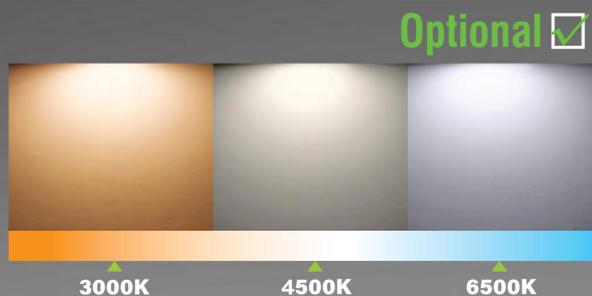


## Solar Flood Light 星域

AB-001



### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

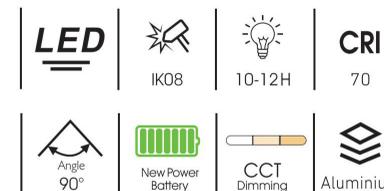

Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
100W	3.2V 10AH	6V 12W	50PCS	212*199*42
200W	3.2V 15AH	6V 18W	75PCS	233*225*45
300W	3.2V 20AH	6V 25W	100PCS	275*247*45
400W	3.2V 30AH	6V 35W	150PCS	330*308*45

### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control



Solar Flood Light

# Fearless of cloudy skies

Fast absorption, high conversion, more charging, Long lifespan

Optional



## Solar Flood Light 云端

AB-005




A variety of lenses are available



### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

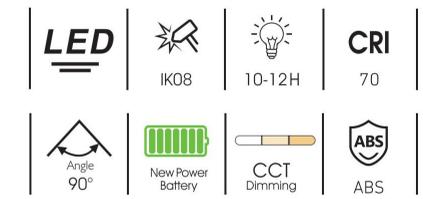

Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
100W	3.2V 5AH	6V 8W	45PCS	237*200*42
200W	3.2V 10AH	6V 15W	50PCS	283*243*45
300W	3.2V 15AH	6V 20W	84PCS	338*290*45
400W	3.2V 20AH	6V 25W	104PCS	366*315*45


### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control



# Light from the Heart

Large angle adjustable bracket, flexible adjustment of lighting direction, unrestricted installation, and wide applicability.

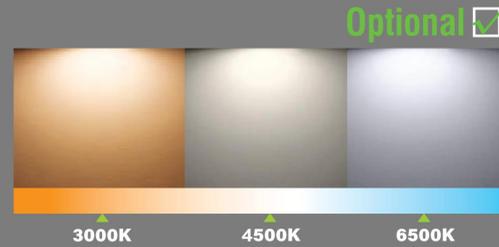

## Solar Flood Light 云慕

AB-004



A variety of lenses are available



Solar Flood Light

### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination



Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
50W	3.2V 5AH	5V 5W	24PCS	174*144*45
100W	3.2V 10AH	5V 10W	45PCS	203*174*45
200W	3.2V 15AH	5V 15W	60PCS	252*212*45
300W	3.2V 20AH	5V 20W	84PCS	306*258*46
400W	3.2V 25AH	5V 25W	104PCS	341*285*46


### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control



# Light from the Heart

Large angle adjustable bracket, flexible adjustment of lighting direction, unrestricted installation, and wide applicability.

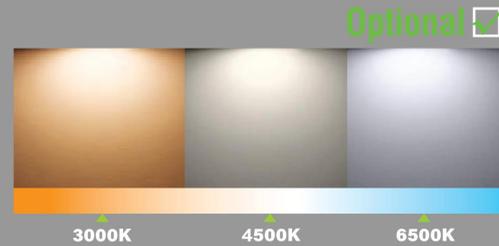

## Solar Flood Light 云翼

AB-003



A variety of lenses are available



Solar Flood Light

### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination



Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
50W	3.2V 5AH	5V 5W	24PCS	194*167*45
100W	3.2V 10AH	5V 10W	45PCS	230*197*45
200W	3.2V 15AH	5V 15W	60PCS	276*236*45
300W	3.2V 20AH	5V 20W	84PCS	330*282*46
400W	3.2V 25AH	5V 25W	104PCS	360*308*46

### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control



# Light from the Heart

Large angle adjustable bracket, flexible adjustment of lighting direction, unrestricted installation, and wide applicability.

Optional



## Solar Flood Light 云盛

AB-007



A variety of lenses are available



### PRODUCT ADVANTAGES AND FEATURES


- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination



Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
100W	3.2V 10AH	15W 6V	45PCS	178*211*70
200W	3.2V 15AH	20W 6V	60PCS	257*217*80
300W	3.2V 25AH	25W 6V	84PCS	310*262*100


### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control

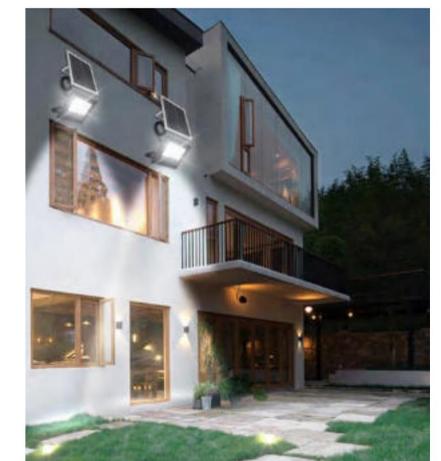


# Automatic lighting

When someone approaches, automatic sensing will activate full light mode, and the human body will automatically recover 20% brightness after passing by

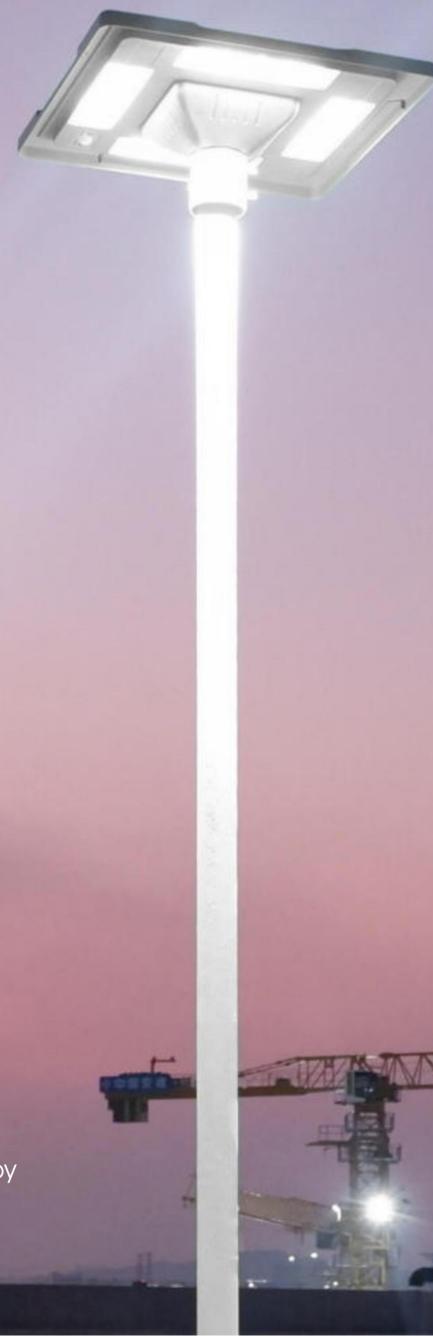


## Solar Garden Light 菱形

AB-801

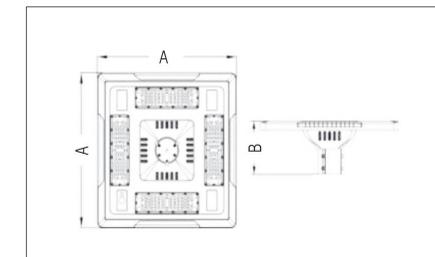

### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

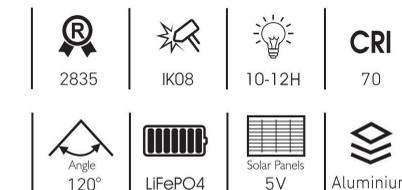

Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
30W	3.2V 25AH	5V 25W	256PCS	515*515*177
40W	3.2V 35AH	5V 35W	256PCS	515*515*177

### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control





# Automatic lighting

When someone approaches, automatic sensing will activate full light mode, and the human body will automatically recover 20% brightness after passing by


## Solar Garden Light 云霄

### AB-800

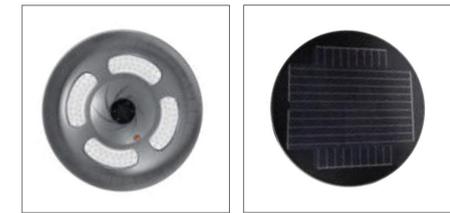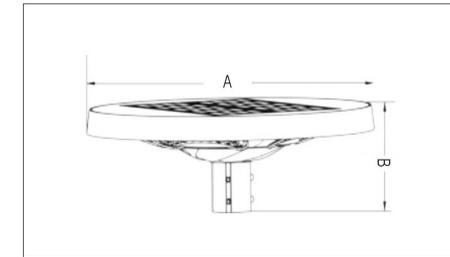

#### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

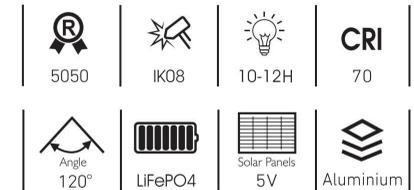

Wattage	Battery	Solar Panel	Led chips	Size(A*B)
30W	3.2V 25AH	5V 25W	104PCS	Ø610*H189
40W	3.2V 35AH	5V 35W	104PCS	Ø610*H189

#### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control



# Solar <sup>IP65</sup> Street Light

Widely used in urban roads, expressways, pedestrian streets, parks, ports and logistics parks.




# Automatic lighting

When someone approaches, automatic sensing will activate full light mode, and the human body will automatically recover 20% brightness after passing by

## Solar Street Light 云阳




### AB-521

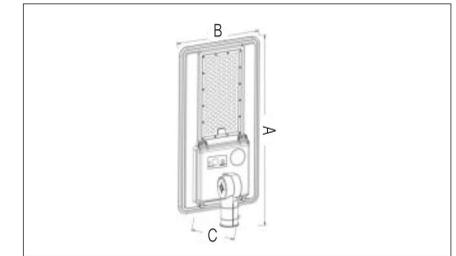

#### PRODUCT ADVANTAGES AND FEATURES


- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

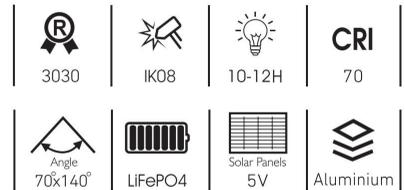

Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
100W	3.2V 10AH	5V 10W	100PCS	550*288*130
200W	3.2V 20AH	5V 20W	180PCS	660*332*130
300W	3.2V 30AH	5V 30W	240PCS	850*347*145

#### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control

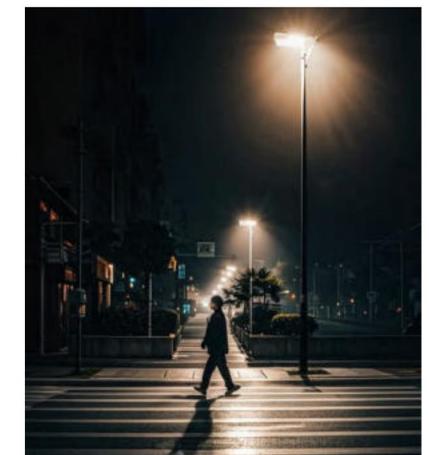

# A lamp



## Multipurpose

Multiple installation methods  
 Installation of street light poles  
 Wall installation  
 Installation of electric poles

## Solar Street Light 云流 A




### AB-501

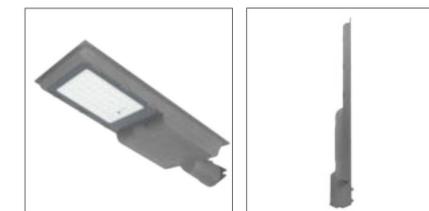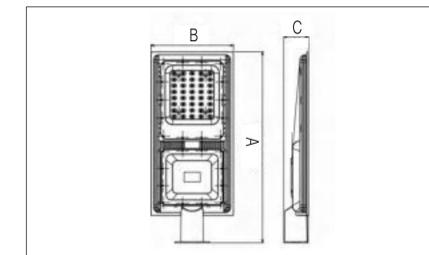

#### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

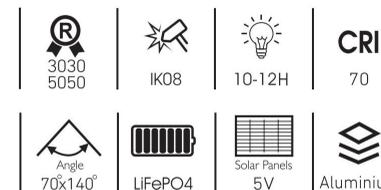

Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
200W	3.2V 15AH	5V 18W	40PCS	588*256*78
300W	3.2V 25AH	5V 28W	84PCS	738*256*78

#### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control



# A lamp


## Multipurpose

Multiple installation methods  
 Installation of street light poles  
 Wall installation  
 Installation of electric poles

## Solar Street Light 云流B




### AB-505

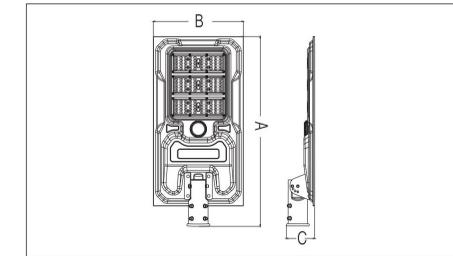

#### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

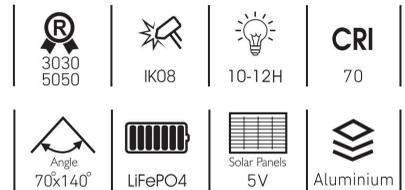

Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
200W	3.2V 15AH	5V 25W	40PCS	679*325*115
300W	3.2V 30AH	5V 45W	84PCS	945*386*117

#### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control



# aerospace Photovoltaic panels

Not afraid of rainy days, short lighting time,  
fast charging speed, high battery  
conversion rate



## Solar Street Light 云耀



### AB-202




A variety of lenses are available



#### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

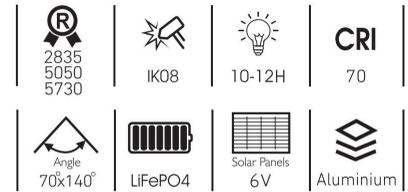

Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
200W	3.2V 20AH	6V 25W	60PCS	481*204*57
300W	3.2V 30AH	6V 35W	60PCS	481*204*57

#### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control



# Fearless of cloudy skies

Fast absorption, high conversion, more charging, Long lifespan


## Solar Street Light 云耀塑料款

### AB-202-E



#### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

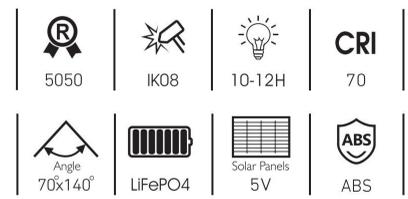

Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
200W	3.2V 20AH	6V 25W	60PCS	415*220*80

#### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control





# Minimalist atmosphere

Excellent die-casting process and high-quality material selection  
The paint surface is firm and not easily worn out

## Solar Street Light 云皓A


### AB-200

ISO CB CE ROHS IP65 LED

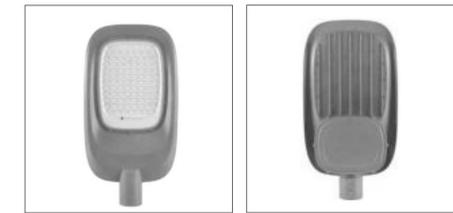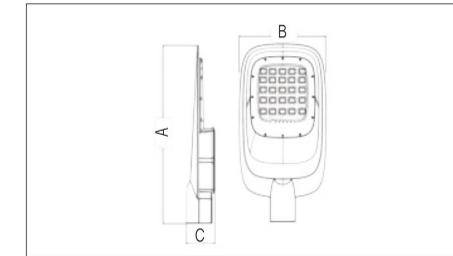

#### PRODUCT ADVANTAGES AND FEATURES


- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

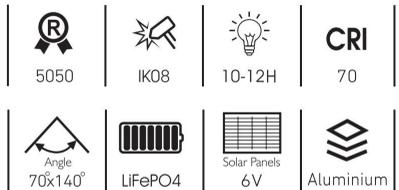

Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
200W	3.2V 20AH	6V 25W	30PCS	408*220*82
400W	3.2V 40AH	6V 45W	60PCS	480*250*82
600W	3.2V 50AH	5V 50W	90PCS	545*290*92

#### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control

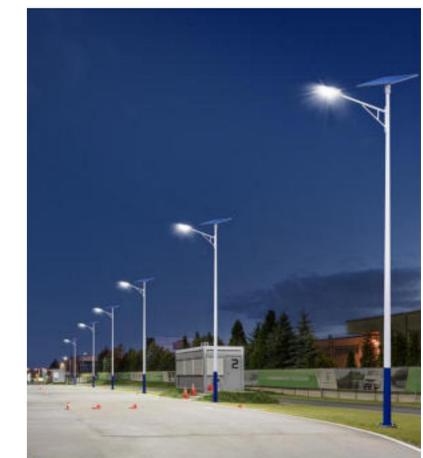




# Minimalist atmosphere

Excellent die-casting process and high-quality material selection  
The paint surface is firm and not easily worn out

## Solar Street Light 云皓B




### AB-208

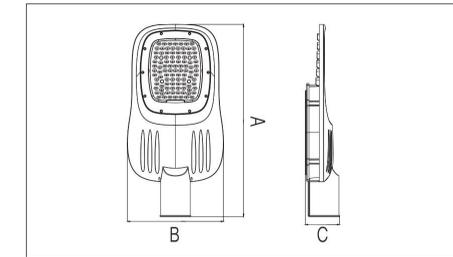

#### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

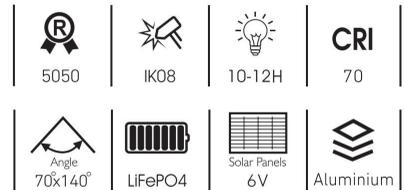

Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
200W	3.2V 20AH	6V 25W	30PCS	446*224*80
400W	3.2V 40AH	6V 45W	60PCS	466*240*80
600W	3.2V 50AH	5V 50W	90PCS	552*291*80

#### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control




# Minimalist atmosphere

Excellent die-casting process and high-quality material selection  
The paint surface is firm and not easily worn out




## Solar Street Light 云皓C

AB-209

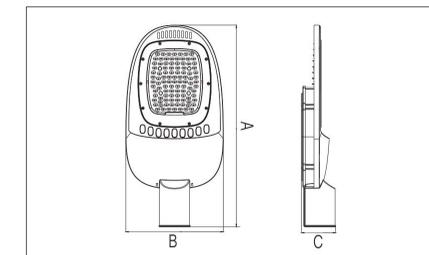

### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

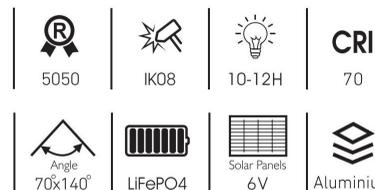

Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
200W	3.2V 20AH	6V 25W	30PCS	452*220*77
400W	3.2V 40AH	6V 45W	60PCS	496*240*80
600W	3.2V 50AH	5V 50W	90PCS	590*300*80

### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control




# Minimalist atmosphere

Excellent die-casting process and high-quality material selection  
The paint surface is firm and not easily worn out


## Solar Street Light 云际

### AB-201

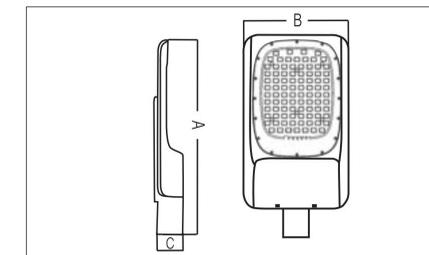

#### PRODUCT ADVANTAGES AND FEATURES

- ◆ A+ solar panel, each has a complete IV curve, conversion efficiency is more than 21.3%
- ◆ LiFePO4 battery, the discharge depth reaches 95% and service lifespan up to 6-8 years, with high safety factor
- ◆ Low voltage led with high lumen efficiency
- ◆ Optical PC lens, luminous efficiency up to 95%
- ◆ High quality aluminum housing, anti-corrosion, durable, artistic, practical. High tech and good surface treatment of products.
- ◆ Innovative designed reflector, high reflection efficiency, greatly enhance the brightness of the lumination

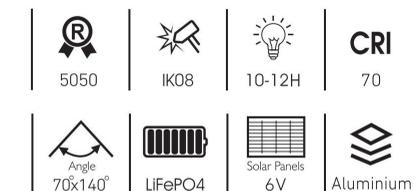

Wattage	Battery	Solar Panel	Led chips	Size(A*B*C)
200W	3.2V 20AH	6V 25W	30PCS	412*220*80
400W	3.2V 40AH	6V 45W	60PCS	486*250*80
600W	3.2V 50AH	5V 50W	90PCS	558*291*80

#### LIGHTING TIME

With Default "Sleep Mode" for longer battery back up time, easy and simple for a "Wake-up" activation, Reasonable designed Discharging time ensure the first 4 hours running in high brightness. AUTO lighting system with remote for ON/OFF and lighting duration, brightness control

